

Product Catalogue 2017

Industrial Pumps & Metering Systems



TABLE OF CONTENTS

Applications	4
Pump Packages	5
Drum Pump Motors	9
Pump Tubes (PP, PPS, CPVC, PHT, PVDF)	11
Performance Curves for Centrifugal Pumps	16
Pump Tubes (SS, AL)	17
Motor & Tube Assembly Details	19
Hand Pumps	20
Accessories For Centrifugal Pumps	21
Heating Jackets (AtEx incl.) for 200 ltr. drums and 1000 ltr. IBC	23
Progressive Cavity Pumps and Lifting Device System	25
SP-700SR Progressive Cavity Series	26
SP-700DD Progressive Cavity Series	27
Performance Curves	28
Lifting Device System for Drum Pumps and Motors	29
Motors for SP-700DD Pumps	30
Accessories for Progressive Cavity Pumps	31
Metering Systems	32
Batch Control System – ELECTRIC (Low Viscosity)	33
Batch Control System – ELECTRIC (High Viscosity)	34
Batch Control System – AIR (Low Viscosity)	35
Batch Control System – AIR (High Viscosity)	36
Turbine Flow Meters	37
Oval Gear Flow Meters	38
PlusAir Air-operated Double Diaphragm (AODD) Pumps	39

MARKETS SERVED



AUTOMOTIVE



WASTE WATER
TREATMENT



CHEMICAL
PACKAGING




PHARMACEUTICAL



PLATING



AGRICULTURE



SEMI-CONDUCTOR



PETROLEUM

APPLICATIONS



Drums & Barrels



Laboratory



Large Storage Vessels



IBCs

Pump Packages



Pump Package SPEK-PPS, A,B,C | Water Treatment Chemicals

Engineered to transfer corrosive chemicals associated with the Water Treatment industry. Common applications include: Corrosion inhibitors and water additives.

Motor Type	SPE-250B
Pump Assembly	PPS
Pump Length	27" (700 mm), 39" (1000 mm) or 47" (1200 mm)
Hose	1,5 m I.D. 3/4" x O.D 1" (25 mm) PVC
Dispensing Nozzle	3/4", Polypropylene (Viton® or EPDM o-ring)
Max. Flow Rate	38 LPM <i>based on water</i>
Max. Viscosity	200 cps (mPas)
Max. Temperature	55° C

Part Number	Voltage	Pump Length
SPEK-PPS-27	220-240V	27" (700 mm)
SPEK-PPS-39	220-240V	39" (1000 mm)
SPEK-PPS-47	220-240V	47" (1200 mm)



Pump Package 1 | Water Treatment Chemicals

Engineered to transfer corrosive chemicals associated with the Water Treatment industry. Common applications include: Sodium Hypochlorite, Potassium Hydroxide and Sodium Bromide.

Motor Type	SP-280P-2-V
Pump Assembly	CPVC
Pump Length	39" (1000 mm) or 47" (1200 mm)
Hose	1,8 m, I.D. 1" (25 mm) PVC
Dispensing Nozzle	1" (25 mm), Polypropylene (Viton® or EPDM o-ring)
Barrel Adapter	Polypropylene
Storage Bracket	Steel
Max. Flow Rate	57 LPM <i>based on water</i>
Max. Viscosity	1500 cps (mPas)
Max. Temperature	88° C

Part Number	Voltage	Pump Length
9431	220-240V	39" (1000 mm)
9433	220-240V	47" (1200 mm)



Pump Package 2 | Acids & Alkalis

Engineered to transfer corrosive liquids. Common applications include: Hydrochloric Acid, Nitric Acid (20%), Acetic Acid and Sulfuric Acid.

Motor Type	SP-280P-2-V
Pump Assembly	Polypropylene
Pump Length	39" (1000 mm) or 47" (1200 mm)
Hose	1,8 m, I.D. 1" (25 mm) PVC
Dispensing Nozzle	1" (25 mm), Polypropylene (Viton® or EPDM o-ring)
Barrel Adapter	Polypropylene
Storage Bracket	Steel
Max. Flow Rate	57 LPM <i>based on water</i>
Max. Viscosity	1500 cps (mPas)
Max. Temperature	55° C

Part Number	Voltage	Pump Length
9401	220-240V	39" (1000 mm)
9403	220-240V	47" (1200 mm)



Pump packages available in 110/120V versions on request.

Pump Packages Continued



Pump Package 3 | Concentrated Acids & Alkalis

Engineered to transfer very concentrated and extremely aggressive liquids. Common applications include: Sulfuric Acid 66 Baumé, Propionic Acid, Concentrated Nitric (98%) and Hydrofluoric Acid.

Motor Type	SP-ENC-2-V
Pump Assembly	PVDF (Kynar®)
Pump Length	39" (1000 mm) or 47" (1200 mm)
Hose	1,8 m, I.D. 1" (25 mm) AtEx/Chem. Hose
Dispensing Nozzle	1" (25 mm), PVDF (Viton® or EPDM o-ring)
Barrel Adapter	Polypropylene
Storage Bracket	Steel
Max. Flow Rate	66 LPM based on water
Max. Pressure	10,6 m
Max. Viscosity	1500 cps (mPas)
Max. Temperature	80° C

Part Number	Voltage	Pump Length
9421A	220-240V	39" (1000 mm)
9423A	220-240V	47" (1200 mm)



Pump Package 4 | Acids & Alkalis Measurement

Unique design allows users to safely measure and transfer corrosive liquids. Common applications include: Hydrochloric Acid, Nitric Acid (20%), Acetic Acid and Sulfuric Acid.

Motor Type	SP-280P-2-V
Pump Assembly	Polypropylene
Pump Length	39" (1000 mm) or 47" (1200 mm)
Hose	1,8 m, I.D. 1" (25 mm) PVC
Dispensing Nozzle	1" (25 mm), Polypropylene (Viton® or EPDM o-ring)
Flow Meter	Digital / Polypropylene
Barrel Adapter	Polypropylene
Storage Bracket	Steel
Max. Flow Rate	51 LPM based on water
Max. Pressure	10,6 m
Max. Viscosity	300 cps (mPas)
Max. Temperature	55° C

Part Number	Voltage	Pump Length
9501A	220-240V	39" (1000 mm)
9503A	220-240V	47" (1200 mm)



Pump Package 5 | Concentrated Acids & Alkalis Measurement

Unique design allows operators to safely measure and transfer concentrated and very aggressive liquids. Common applications include: Sulfuric Acid 66 Baumé, Propionic Acid, Concentrated Nitric (98%) and Hydrofluoric Acid.

Motor Type	SP-ENC-2-V (B) or SPE-450V (C)
Pump Assembly	PVDF (Kynar®)
Pump Length	39" (1000 mm) or 47" (1200 mm)
Hose	1,8 m, I.D. 1" (25 mm) AtEx/Chem. Hose
Dispensing Nozzle	1" (25 mm), PVDF (Viton® or EPDM o-ring)
Flow Meter	Digital / PVDF
Barrel Adapter	Polypropylene
Storage Bracket	Steel
Max. Flow Rate	61 LPM based on water (SP-ENC-2-V)
Max. Viscosity	300 cps (mPas)
Max. Temperature	80° C

Part Number	Voltage	Pump Length
9511B	220-240V	39" (1000 mm)
9511C	220-240V	39" (1000 mm)
9513B	220-240V	47" (1200 mm)
9513C	220-240V	47" (1200 mm)

Pump packages available in 110/120V versions on request.

Pump Packages Continued



Pump Package 6 | Mineral acids

Engineered to transfer mineral acids and suitable chemicals. Applications include: nitric acid (<60%) and citric acid.

Motor Type	SP-280P-2-V
Pump Assembly	SS316
Pump Length	39" (1000 mm) or 47" (1200 mm)
Hose	1,8 m, I.D. 1" (25 mm) PVC
Dispensing Nozzle	1" (25 mm), SS316
Barrel Adapter	Stainless Steel
Storage Bracket	Steel
Max. Flow Rate	79 LPM <i>based on water</i>
Max. Viscosity	1500 cps (mPas)
Max. Temperature	80° C

Part Number	Voltage	Pump Length
9715	220-240V	39" (1000 mm)
9717	220-240V	47" (1200 mm)



Pump Package 7 | Non-corrosive liquids and light oils

Standard Pumps Aluminum Pump Package is designed to transfer non-corrosive liquids such as machining lubricants, hydraulic fluid, motor oil, anti-freeze and light oils from barrels and tote tanks. This package has been engineered to be light weight and portable while still maintaining a robust quality and high rate of flow.

Motor Type	SP-280P-2-V
Pump Assembly	AL
Pump Length	39" (1000 mm) or 47" (1200 mm)
Hose	1,8 m I.D. 3/4" x O.D 1" (25 mm) PVC
Dispensing Nozzle	1" (25 mm), Aluminium
Barrel Adapter	SS depending on liquid
Storage Bracket	Steel
Max. Flow Rate	83 LPM <i>based on water</i>
Max. Viscosity	1500 cps (mPas)
Max. Temperature	80° C

Part Number	Voltage	Pump Length
9761	220-240V	39" (1000 mm)
9763	220-240V	47" (1200 mm)



Pump Package 8 | AtEx pump package

Standard Pumps Explosion Proof Drum Pump (AIR) is designed safely transfer highly flammable/combustible liquids and meets the stringent safety requirements of the Chemical Processing Industry. Common applications include: Alcohol, Isopropyl Ether, Aqueous Ammonia, Xylene, Gasoline, Solvents, Petroleum Products and Toluene.

Motor Type	SP-A1
Pump Assembly	SS316
Pump Length	39" (1000 mm) or 47" (1200 mm)
Hose	1,8 m, I.D. 1" (25 mm) AtEx/Chem. Hose
Dispensing Nozzle	1" (25 mm), SS316
Barrel Adapter	Stainless Steel
Storage Bracket	Steel
Max. Flow Rate	64 LPM <i>based on water</i>
Max. Viscosity	750 cps (mPas)
Max. Temperature	AtEx: 40° C (non-AtEx Application: 80° C)

Part Number	Output	Pump Length
9904	370W	39" (1000 mm)
9906	370W	47" (1200 mm)



Pump packages available in 110/120V versions on request.

Pump Packages Continued



Pump Package 9 | Flammable & Combustible Liquids

Explosion Proof Drum Pump is a safe solution for transferring highly flammable/combustible liquids and meets the stringent safety requirements of the Chemical Processing Industry. Applications include: Alcohol, Isopropyl Ether, Gasoline, Solvents, Aqueous Ammonia, Petroleum Products, Xylene, Toluene.

Motor Type	SP-420EX (IP 54)
Pump Assembly	SS316
Pump Length	39" (1000 mm) or 47" (1200 mm)
Hose	1,8 m, I.D. 1" (25 mm) AtEx/Chem. Hose
Dispensing Nozzle	1" (25 mm) SS316
Barrel Adapter	Stainless Steel
Storage Bracket	Steel
Max. Flow Rate	68 LPM <i>based on water</i>
Max. Viscosity	750 cps (mPas)
Max. Temperature	AtEx: 40° C (non-AtEx Application: 80° C)

Part Number	Voltage	Pump Length
9911	220-240V	39" (1000 mm)
9913	220-240V	47" (1200 mm)



Pump Package SPEK-ALU-ATEX | Non-corrosive liquids and light oils

Standard Pumps Explosion Proof Drum Pump is designed safely transfer highly flammable/combustible liquids and meets the stringent safety requirements of the Chemical Processing Industry. Common applications include: Alcohol, Isopropyl Ether, Gasoline, Solvents, Aqueous Ammonia and Petroleum products.

Motor Type	SP-420EX (IP54)
Pump Assembly	AL
Pump Length	39" (1000 mm) or 47" (1200 mm)
Hose	1,8 m, I.D. 1" (25 mm) AtEx/Chem. Hose
Dispensing Nozzle	1" (25 mm), Aluminium
Barrel Adapter	Aluminium
Storage Bracket	Stainless Steel
Max. Flow Rate	83 LPM <i>based on water</i>
Max. Pressure	10,6 m
Max. Viscosity	750 cps (mPas)
Max. Temperature	40° C (non-AtEx Application: 80° C)

Part Number	Voltage	Pump Length
SPEK-ALU-ATEX-39	220-240V	39" (1000 mm)
SPEK-ALU-ATEX-47	220-240V	47" (1200 mm)



Pump Package SPEK-ALU-ATEX-AIR | Non-corrosive liquids and light oils

Standard Pumps Proof Drum Pump (AIR) is designed safely transfer highly flammable/combustible liquids and meets the stringent safety requirements of the Chemical Processing Industry. Common applications include: Alcohol, Isopropyl Ether, Gasoline, Solvents, Aqueous Ammonia and Petroleum products.

Motor Type	SP-A1
Pump Assembly	AL
Pump Length	39" (1000 mm) or 47" (1200 mm)
Hose	1,8 m, I.D. 1" (25 mm) AtEx/Chem. Hose
Dispensing Nozzle	1" (25 mm), Aluminium
Barrel Adapter	Aluminium
Storage Bracket	Stainless Steel
Max. Flow Rate	83 LPM <i>based on water</i>
Max. Pressure	10,6 m
Max. Viscosity	450 cps (mPas)
Max. Temperature	40° C (non-AtEx Application: 80° C)

Part Number	Output	Pump Length
SPEK-ALU-ATEX-AIR-39	370W	39" (1000 mm)
SPEK-ALU-ATEX-AIR-47	370W	47" (1200 mm)

Pump packages available in 110/120V versions on request.

Drum Pump Motors



SPE-12V/24V Series



Part Number	Enclosure	Power	Watt	V.S.D	Gross WT kg
SPE-12VA	Open Drip Proof (IP44)	12V DC PLUG	150	No	2,3
SPE-24VA	Open Drip Proof (IP44)	24V DC PLUG	150	No	2,3

Battery plugs: Only on request



Note: V.S.D. = Variable Speed Drive.



SPE-250 B



Part Number	Enclosure	Power	Watt	V.S.D	Gross WT kg
SPE-250B	Open Drip Proof (IP44)	230V/50-60Hz	250	No	2,3

Note: V.S.D. = Variable Speed Drive.

⚠ Warning: Not suitable for pumping flammable or combustible liquids.

⚠ Warning: Not recommended for use with the SP-700SR Series pump.



SPE-450 Series



Part Number	Enclosure	Power	Watt	V.S.D	Gross WT kg
SPE-450	TEFC (IP54)	230V/50-60Hz	450	No	3,3
SPE-450V	TEFC (IP54)	230V/50-60Hz	450	Yes	3,3

Note: V.S.D. = Variable Speed Drive.

⚠ Warning: Not suitable for pumping flammable or combustible liquids.

⚠ Warning: Not recommended for use with the SP-700SR Series pump.



SP-280P Series



Part Number	Enclosure	Power	Watt	V.S.D	LVR	Gross WT kg
SP-280P-2	Open Drip Proof (IP44)	230-240V/50-60Hz	825	No	Yes	4,0
SP-280P-2-V	Open Drip Proof (IP44)	230-240V/50-60Hz	825	Yes	Yes	4,0

Note: Pump Motors available in 110/120V on request.

Note: V.S.D. = Variable Speed Drive.

Note: LVR= Low Voltage Release.

⚠ Warning: Not suitable for pumping flammable or combustible liquids.

⚠ Warning: Not recommended for use with the SP-700SR Series pump.



SP-ENC Series



Part Number	Enclosure	Power	Watt	V.S.D	LVR	Gross WT kg
SP-ENC-2	TEFC (IP54)	230-240V/50-60Hz	825	No	Yes	5,7
SP-ENC-2-V	TEFC (IP54)	230-240V/50-60Hz	825	Yes	Yes	5,7

⚠ Warning: Not suitable for pumping flammable or combustible liquids.

Note: Pump Motors available in 110/120V on request.

Note: V.S.D. = Variable Speed Drive.

Note: LVR= Low Voltage Release.



SPE-950 Series



Part Number	Enclosure	Power	Watt	V.S.D	Gross WT kg
SPE-950	TEFC (IP54)	230V/50-60Hz	950	No	3,3
SPE-950V	TEFC (IP54)	230V/50-60Hz	950	Yes	3,3

⚠ Warning: Not suitable for pumping flammable or combustible liquids.

Note: V.S.D. = Variable Speed Drive



SP-420EX



Part Number	Enclosure	Power	Watt	V.S.D	LVR	Gross WT kg
SP-420EX	Explosion Proof	220-240V/1/50-60Hz	600	No	Yes	7,7

Note: Explosion proof motor regulations require that motors shall be returned to the manufacturer for repair.

Note: V.S.D. = Variable Speed Drive

Note: LVR = Low Voltage Release

⚠ See warning at bottom of page.



SP-A1



Part Number	Consumption	Max. Inlet Pressure	Output	Gross WT kg
SP-A1	22 CFM @ 90 psi 10.4 L/sec @ 6,2 bar	100 psi 6,8 bar	1/2 HP 370W	1,2

⚠ Warning: Not recommended for use with the SP-700SR Series pump.

⚠ See warning at bottom of page.



SP-A2 Series



Part Number	Consumption	Max. Inlet Pressure	Output	Gross WT kg
SP-A2	28 CFM @ 90 psi 13.2 L/sec @ 6,2 bar	100 psi 6,8 bar	3/4 HP 560W	1,5
SP-A2TL (trigger lock)	28 CFM @ 90 psi 13.2 L/sec @ 6,2 bar	100 psi 6,8 bar	3/4 HP 560W	1,5

⚠ Warning: Not recommended for use with the SP-700SR Series pump.

⚠ Warning: Not suitable for pumping flammable or combustible liquids.

Note: Pump Motors available in 110/120V on request.

⚠ Warning: Pumping of flammables or combustible liquids can generate a static electric discharge, causing fire or explosion resulting in injury or death. Read and understand operating instructions before starting this unit. Follow all federal, state and local safety codes including NFPA 30 - NFPA77. Prior to connecting to air supply, install bond and ground wires and check continuity of each wire. A meter reading of one ohm or less is required for safe liquid transfer. Use only metallic drum, receiving vessel and metallic pump when pumping flammables. Air motors are not recognized under any current Underwriter's Laboratory listing program. Consult a qualified engineer for suitability for use in a hazardous area or on flammables.

Pump Tubes – Polypropylene Series


STANDARD's Polypropylene pump tube is engineered for transferring a variety of corrosive liquids. Robust Polypropylene ensures chemical resistance against light to aggressive chemicals.

Common Applications

- Acetic Acid
- Sulfuric Acid
- Hydrochloric (20%)
- Nitric Acid (20%)
- Alkalies
- Ferric Chloride

Technical Specifications

Wetted Parts	Polypropylene, Carbon, Hastelloy
Max. Viscosity	1500 cps (mPas) (SP-280P, SP-ENC, SPE-950) 750 cps (mPas) (SPE-450, SP-A2, SP-420EX) 450 cps (mPas) (SP-A1) 200 cps (mPas) (SPE-250B), 100 cps (mPas) (SPE-12/24V)
Discharge Options	1" (25 mm), 3/4" (19 mm) Hose Barb
Pump Design	Seal-less / Centrifugal
Max. Specific Gravity	1.8*
Max. Temperature	55°C

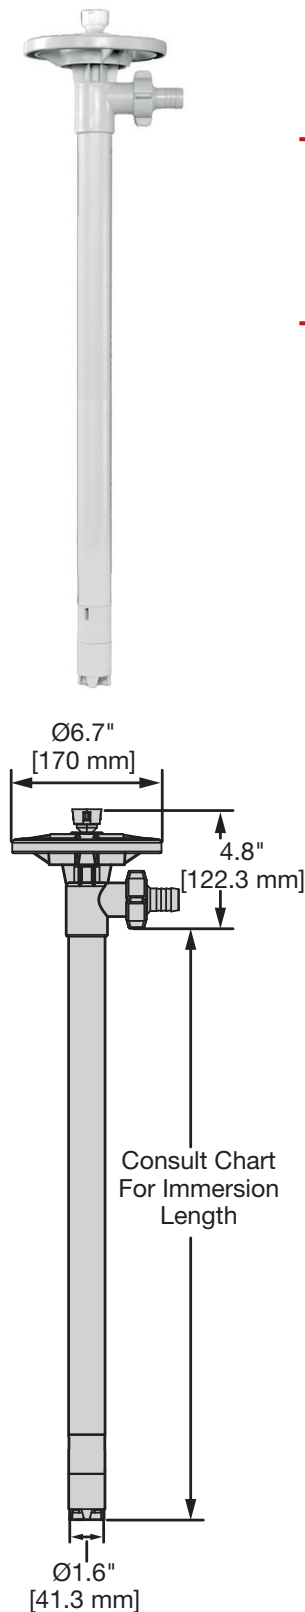

Part Number	Assembly	Immersion Length	Shaft	Impeller
SP-PP-27	Polypropylene	27" (700 mm)	Hastelloy	High Volume
SP-PP-39	Polypropylene	39" (1000 mm)	Hastelloy	High Volume
SP-PP-47	Polypropylene	47" (1200 mm)	Hastelloy	High Volume
SP-PP-50	Polypropylene	50" (1270 mm)	Hastelloy	High Volume
SP-PP-60	Polypropylene	60" (1500 mm)	Hastelloy	High Volume
SP-PP-72	Polypropylene	72" (1800 mm)	Hastelloy	High Volume
SP-PP-HH-27	Polypropylene	27" (700 mm)	Hastelloy	High Pressure
SP-PP-HH-39	Polypropylene	39" (1000 mm)	Hastelloy	High Pressure
SP-PP-HH-47	Polypropylene	47" (1200 mm)	Hastelloy	High Pressure
SP-PP-HH-50	Polypropylene	50" (1270 mm)	Hastelloy	High Pressure
SP-PP-HH-60	Polypropylene	60" (1500 mm)	Hastelloy	High Pressure
SP-PP-HH-72	Polypropylene	72" (1800 mm)	Hastelloy	High Pressure

Flow curves for these pumps, please see page 16.

Pump Tubes – Polypropylene Series with SS316 Shaft




STANDARD's Polypropylene pump tube with SS316 shaft is engineered for transferring a variety of corrosive liquids. Robust Polypropylene and SS316 shaft ensures chemical resistance against light chemicals.

Common Applications

- Aluminium Hydroxide
- Citric Acid
- Sodium Sulfate
- Etyhylene Glycol
- Glycerin
- Ferric Nitrate

Technical Specifications

Wetted Parts	Polypropylene, Carbon, SS316
Max. Viscosity	1500 cps (mPas) (SP-280P, SP-ENC, SPE-950) 750 cps (mPas) (SPE-450, SP-A2, SP-420EX) 450 cps (mPas) (SP-A1) 200 cps (mPas) (SPE-250B), 100 cps (mPas) (SPE-12/24V)
Discharge Options	1" (25 mm), ¾" (19 mm) Hose Barb
Pump Design	Seal-less / Centrifugal
Max. Specific Gravity	1.8*
Max. Temperature	55° C

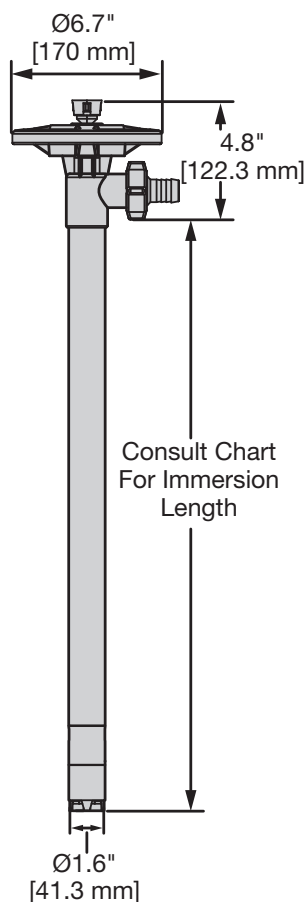

Part Number	Assembly	Immersion Length	Shaft	Impeller
SP-PPS-27	Polypropylene	27" (700 mm)	Stainless Steel	High Volume
SP-PPS-39	Polypropylene	39" (1000 mm)	Stainless Steel	High Volume
SP-PPS-47	Polypropylene	47" (1200 mm)	Stainless Steel	High Volume
SP-PPS-50	Polypropylene	50" (1270 mm)	Stainless Steel	High Volume
SP-PPS-60	Polypropylene	60" (1500 mm)	Stainless Steel	High Volume
SP-PPS-72	Polypropylene	72" (1800 mm)	Stainless Steel	High Volume
SP-PPS-HH-27	Polypropylene	27" (700 mm)	Stainless Steel	High Pressure
SP-PPS-HH-39	Polypropylene	39" (1000 mm)	Stainless Steel	High Pressure
SP-PPS-HH-47	Polypropylene	47" (1200 mm)	Stainless Steel	High Pressure
SP-PPS-HH-50	Polypropylene	50" (1270 mm)	Stainless Steel	High Pressure
SP-PPS-HH-60	Polypropylene	60" (1500 mm)	Stainless Steel	High Pressure
SP-PPS-HH-72	Polypropylene	72" (1800 mm)	Stainless Steel	High Pressure

Flow curves for these pumps, please see page 16.

Pump Tubes – High Temperature Polypropylene Series




STANDARD's High Temperature Polypropylene (PHT) pump tube is engineered for transferring high temperature corrosive liquids. Robust Polypropylene ensures chemical resistance and excellent heat deflection properties against light to mildly aggressive chemicals.

Common Applications

- Acetic Acid
- Sulfuric Acid
- Hydrochloric (20%)
- Nitric Acid (20%)
- Alkalies
- Ferric Chloride

Technical Specifications

Wetted Parts	Polypropylene, Carbon, Hastelloy
Max. Viscosity	1500 cps (mPas) (SP-280P, SP-ENC, SPE-950) 750 cps (mPas) (SPE-450, SP-A2, SP-420EX) 450 cps (mPas) (SP-A1) 200 cps (mPas) (SPE-250B), 100 cps (mPas) (SPE-12/24V)
Discharge Options	1" (25 mm), 3/4" (19 mm) Hose Barb
Pump Design	Seal-less / Centrifugal
Max. Specific Gravity	1.8*
Max. Temperature	80° C

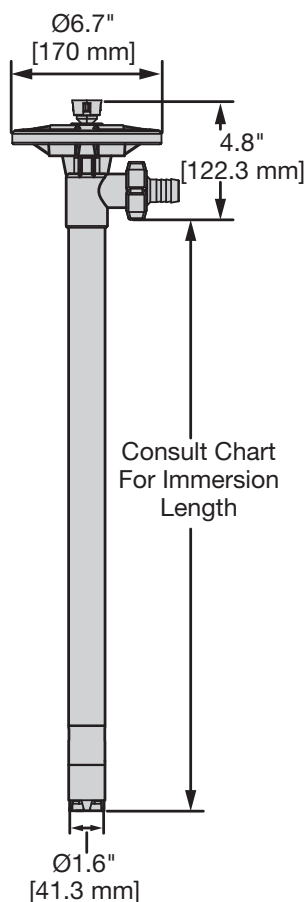

Part Number	Assembly	Immersion Length	Shaft	Impeller
SP-PHT-27	Polypropylene	27" (700 mm)	Hastelloy	High Volume
SP-PHT-39	Polypropylene	39" (1000 mm)	Hastelloy	High Volume
SP-PHT-47	Polypropylene	47" (1200 mm)	Hastelloy	High Volume
SP-PHT-50	Polypropylene	50" (1270 mm)	Hastelloy	High Volume
SP-PHT-60	Polypropylene	60" (1500 mm)	Hastelloy	High Volume
SP-PHT-72	Polypropylene	72" (1800 mm)	Hastelloy	High Volume
SP-PHT-HH-27	Polypropylene	27" (700 mm)	Hastelloy	High Pressure
SP-PHT-HH-39	Polypropylene	39" (1000 mm)	Hastelloy	High Pressure
SP-PHT-HH-47	Polypropylene	47" (1200 mm)	Hastelloy	High Pressure
SP-PHT-HH-50	Polypropylene	50" (1270 mm)	Hastelloy	High Pressure
SP-PHT-HH-60	Polypropylene	60" (1500 mm)	Hastelloy	High Pressure
SP-PHT-HH-72	Polypropylene	72" (1800 mm)	Hastelloy	High Pressure

Flow curves for these pumps, please see page 16.

Pump Tubes – CPVC Series




STANDARD's CPVC pump tube is engineered for transferring corrosive chemicals commonly used in the Water Treatment Industry. Robust CPVC offers excellent durability and chemical resistance.

Common Applications

- Sodium Hypochlorite
- Chlorinated Water
- Calcium Chloride
- Potassium Hydroxide
- Calcium Hydroxide
- Sodium Bromide

Technical Specifications

Wetted Parts	CPVC, Carbon, Hastelloy
Max. Viscosity	1500 cps (mPas) (SP-280P, SP-ENC, SPE-950) 750 cps (mPas) (SPE-450, SP-A2, SP-420EX) 450 cps (mPas) (SP-A1) 200 cps (mPas) (SPE-250B), 100 cps (mPas) (SPE-12/24V)
Discharge Options	1" (25 mm), ¾" (19 mm) Hose Barb
Pump Design	Seal-less / Centrifugal
Max. Specific Gravity	1.8*
Max. Temperature	88° C

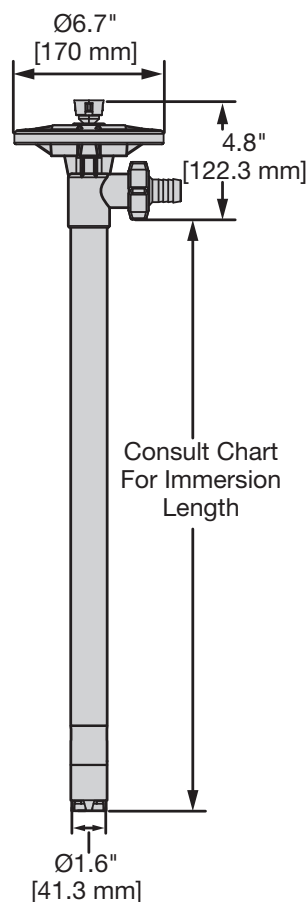

Part Number	Assembly	Immersion Length	Shaft	Impeller
SP-CPVC-27	CPVC	27" (700 mm)	Hastelloy	High Volume
SP-CPVC-39	CPVC	39" (1000 mm)	Hastelloy	High Volume
SP-CPVC-47	CPVC	47" (1200 mm)	Hastelloy	High Volume
SP-CPVC-50	CPVC	50" (1270 mm)	Hastelloy	High Volume
SP-CPVC-60	CPVC	60" (1500 mm)	Hastelloy	High Volume
SP-CPVC-72	CPVC	72" (1800 mm)	Hastelloy	High Volume
SP-CPVC-HH-27	CPVC	27" (700 mm)	Hastelloy	High Pressure
SP-CPVC-HH-39	CPVC	39" (1000 mm)	Hastelloy	High Pressure
SP-CPVC-HH-47	CPVC	47" (1200 mm)	Hastelloy	High Pressure
SP-CPVC-HH-50	CPVC	50" (1270 mm)	Hastelloy	High Pressure
SP-CPVC-HH-60	CPVC	60" (1500 mm)	Hastelloy	High Pressure
SP-CPVC-HH-72	CPVC	72" (1800 mm)	Hastelloy	High Pressure

Flow curves for these pumps, please see page 16.

Pump Tubes – PVDF (Kynar®) Series



STANDARD's PVDF pump tube is engineered for transferring highly concentrated and aggressive liquids. Robust PVDF offers excellent durability and chemical resistance.

Common Applications

- Concentrated Nitric Acid
- Sulfuric Acid-66 Baume
- Sodium Hypochlorite
- Hydrofluoric Acid
- Propionic Acid
- Searic Acid

Technical Specifications

Wetted Parts	PVDF, Carbon, Hastelloy
Max. Viscosity	1500 cps (mPas) (SP-280P, SP-ENC, SPE-950) 750 cps (mPas) (SPE-450, SP-A2, SP-420EX) 450 cps (mPas) (SP-A1) 200 cps (mPas) (SPE-250B), 100 cps (mPas) (SPE-12/24V)
Discharge Options	1" (25 mm), ¾" (19 mm) Hose Barb
Pump Design	Seal-less / Centrifugal
Max. Specific Gravity	1.8*
Max. Temperature	80° C

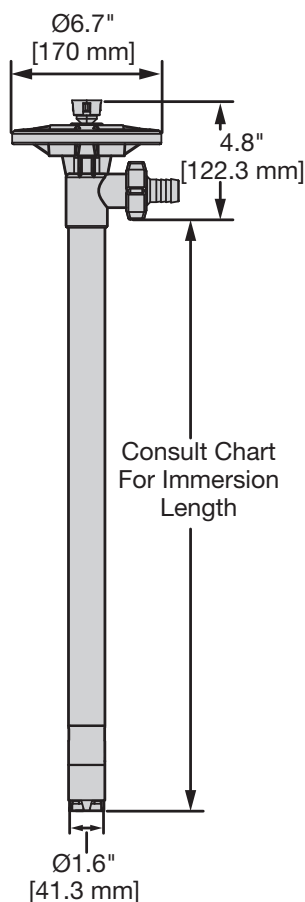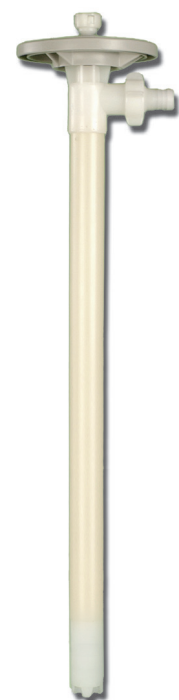


Part Number	Assembly	Immersion Length	Shaft	Impeller
SP-PVDF-27	PVDF	27" (700 mm)	Hastelloy	High Volume
SP-PVDF-39	PVDF	39" (1000 mm)	Hastelloy	High Volume
SP-PVDF-47	PVDF	47" (1200 mm)	Hastelloy	High Volume
SP-PVDF-50	PVDF	50" (1270 mm)	Hastelloy	High Volume
SP-PVDF-60	PVDF	60" (1500 mm)	Hastelloy	High Volume
SP-PVDF-72	PVDF	72" (1800 mm)	Hastelloy	High Volume
SP-PVDF-HH-27	PVDF	27" (700 mm)	Hastelloy	High Pressure
SP-PVDF-HH-39	PVDF	39" (1000 mm)	Hastelloy	High Pressure
SP-PVDF-HH-47	PVDF	47" (1200 mm)	Hastelloy	High Pressure
SP-PVDF-HH-50	PVDF	50" (1270 mm)	Hastelloy	High Pressure
SP-PVDF-HH-60	PVDF	60" (1500 mm)	Hastelloy	High Pressure
SP-PVDF-HH-72	PVDF	72" (1800 mm)	Hastelloy	High Pressure

Flow curves for these pumps, please see page 16.

Performance Curves for Centrifugal Pumps

SP-PP, SP-PPS, SP-PHT, SP-CPVC & SP-PVDF

High Volume Pumps:

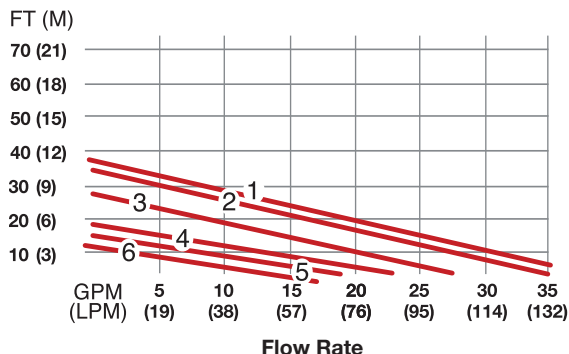


Motor:

- 1 SPE-950
- 2 SP-280P, SP-ENC
- 3 SPE-450, SP-A2, SP-420EX
- 4 SPE-250B
- 5 SP-A1, SPE-24V
- 6 SPE-12V

⚠ Warning: Pump not suitable for pumping flammable liquids.

High Pressure Pumps:

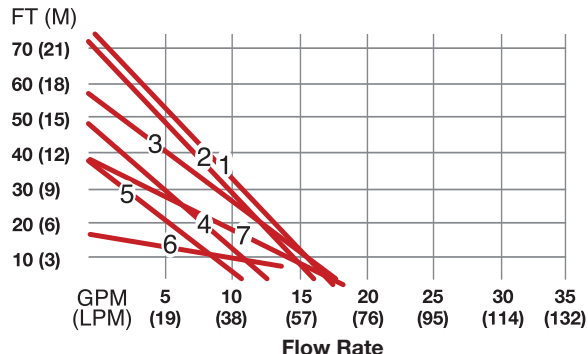

Motor:


- 1 SPE-950
- 2 SP-280P, SP-ENC
- 3 SPE-450, SP-A2, SP-420EX
- 4 SPE-250B
- 5 SP-A1
- 6 SPE-12V
- 7 SPE-24V

*Note: Max. Specific Gravity is 1.8 when used in conjunction with 825 watt motor or 950 watt motor.

SP-AL, SP-SS, SP-6600/6700 Series, SP-7600/7700 Series




High Volume Pumps:

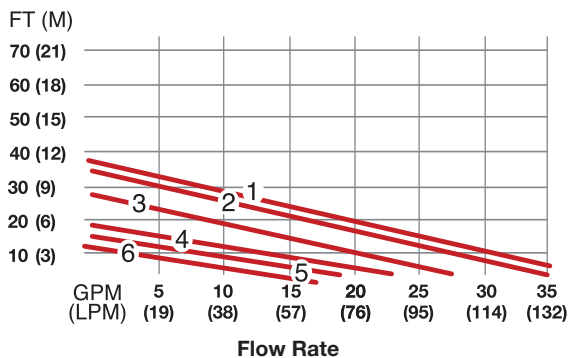

Motor:

- 1 SPE-950
- 2 SP-280P, SP-ENC
- 3 SPE-450, SP-A2, SP-420EX
- 4 SPE-250B
- 5 SP-A1, SPE-24V
- 6 SPE-12V

High Pressure Pumps:

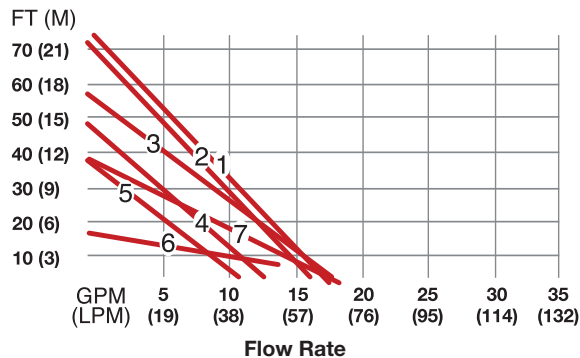

Motor:

- 1 SPE-950
- 2 SP-280P, SP-ENC
- 3 SPE-450, SP-A2, SP-420EX
- 4 SPE-250B
- 5 SP-A1
- 6 SPE-12V
- 7 SPE-24V

Performance measured by pumping clean water at 20° C.

⚠ Warning: When pumping flammable or combustible liquids pump tube must be used in conjunction with an explosion proof motor.

*Note: Max. Specific Gravity is 1.8 when used in conjunction with 825 watt motor or 950 watt motor.

Pump Tubes – Stainless Steel Series




STANDARD's Stainless pump tube is engineered for transferring flammable and combustible liquids as well as light oils and suitable chemicals. Robust Stainless Steel 316 offers excellent strength and durability.

Common Applications

- Alcohol
- Isopropyl Ether
- Gasoline
- Solvents
- Aqueous Ammonia
- Petroleum Products

Technical Specifications

Wetted Parts	SS316, Carbon, PTFE
Max. Viscosity	1500 cps (mPas) (SP-280P, SP-ENC, SPE-950) 750 cps (mPas) (SPE-450, SP-A2, SP-420EX) 450 cps (mPas) (SP-A1) 200 cps (mPas) (SPE-250B), 100 cps (mPas) (SPE-12/24V)
Discharge Options	1" (25 mm) / 3/4" (19 mm) Hose Barb
Pump Design	Seal-less / Centrifugal
Max. Specific Gravity	1.8*
Max. Temperature	80° C, AtEx: 40° C

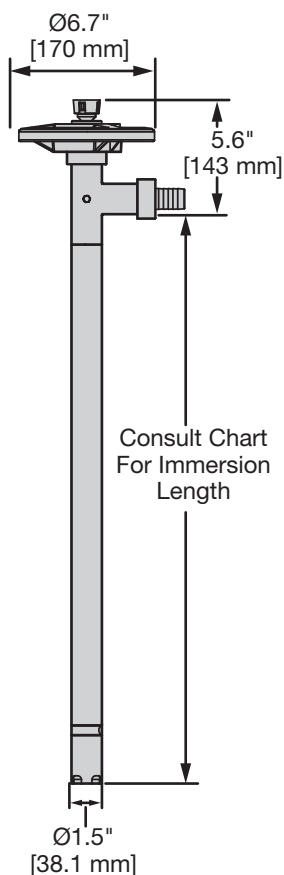

Part Number	Assembly	Immersion Length	Shaft	Impeller
SP-7600-27	Stainless 316	27" (700 mm)	Stainless 316	High Volume
SP-7600-39	Stainless 316	39" (1000 mm)	Stainless 316	High Volume
SP-7600-47	Stainless 316	47" (1200 mm)	Stainless 316	High Volume
SP-7600-60	Stainless 316	60" (1500 mm)	Stainless 316	High Volume
SP-7600-72	Stainless 316	72" (1800 mm)	Stainless 316	High Volume
SP-7700-27	Stainless 316	27" (700 mm)	Stainless 316	High Pressure
SP-7700-39	Stainless 316	39" (1000 mm)	Stainless 316	High Pressure
SP-7700-47	Stainless 316	47" (1200 mm)	Stainless 316	High Pressure
SP-7700-60	Stainless 316	60" (1500 mm)	Stainless 316	High Pressure
SP-7700-72	Stainless 316	72" (1800 mm)	Stainless 316	High Pressure

Flow curves for these pumps, please see page 16.

Pump Tubes – Aluminium Pump Series




STANDARD's Aluminium pump tube is engineered for transferring non-corrosive liquids such as Machining Lubricants, hydraulic fluid, motor oil, antifreeze and Light Oils. Robust Aluminium construction offers excellent strength and durability.

Common Applications

- Motor Oil (up to 30 Wt)
- Anti-Freeze
- Lubricating Oils
- Light Machining Oils
- Hydraulic Fluid

Technical Specifications

Wetted Parts	Aluminium, Carbon, PTFE & SS316
Max. Viscosity	1500 cps (mPas) (SP-280P, SP-ENC, SPE-950) 750 cps (mPas) (SPE-450, SP-A2, SP-420EX) 450 cps (mPas) (SP-A1) 200 cps (mPas) (SPE-250B), 100 cps (mPas) (SPE-12/24V)
Discharge Options	1" (25 mm) / 3/4" (19 mm) Hose Barb
Pump Design	Seal-less / Centrifugal
Max. Specific Gravity	1.8*
Max. Temperature	80° C, AtEx: 40° C

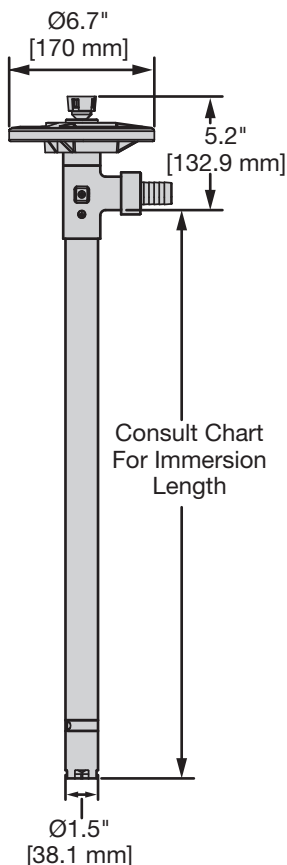

Part Number	Assembly	Immersion Length	Shaft	Impeller
SP-6600-27	Aluminium	27" (700 mm)	Hastelloy	High Volume
SP-6600-39	Aluminium	39" (1000 mm)	Hastelloy	High Volume
SP-6600-47	Aluminium	47" (1200 mm)	Hastelloy	High Volume
SP-6600-60	Aluminium	60" (1500 mm)	Hastelloy	High Volume
SP-6600-72	Aluminium	72" (1800 mm)	Hastelloy	High Volume
SP-6700-27	Aluminium	27" (700 mm)	Hastelloy	High Pressure
SP-6700-39	Aluminium	39" (1000 mm)	Hastelloy	High Pressure
SP-6700-47	Aluminium	47" (1200 mm)	Hastelloy	High Pressure
SP-6700-60	Aluminium	60" (1500 mm)	Hastelloy	High Pressure
SP-6700-72	Aluminium	72" (1800 mm)	Hastelloy	High Pressure

Flow curves for these pumps, please see page 16.

Motor & Tube Assembly Details

SP-280 and SP-ENC



Hand Pumps

Standard Pump Europe's hand pumps are engineered for transferring mainly oils from drums and storage tanks.

SPE OK 9B

Common Applications

- Motor oil to SAE 80
- Gearbox oil to SAE 80
- Hydraulic oil to SAE 80

Technical Specifications

Part Number	SPE OK 9B
Wetted Parts	Steel, steel galvanised, brass, zinc casting alloy, POM, Novotex, NBR, Ramilon, Lupolen (not media touched)
Pump Design	Simple-acting reciprocating piston pump
Flow Rate	approx. 0,25 liter/stroke
Outlet Manifold	Drip tight outlet
Barrel Connection	G 2"
Suction Pipe	840 mm
Clasp for Padlock	
Adjustable Drum Screw Connector	



SPE K10 C



Common Applications

- Diesel
- Heating Oil EL/L
- Fuels (AI-III)
- Petroleum
- Anti-freeze (undiluted)
- Low viscosity mineral oils

Technical Specifications

Part Number	SPE K10 C
Wetted Parts	Steel, steel galvanised, brass, zinc casting alloy, POM, Novotex, NBR, Ramilon, Lupolen (not media touched)
Pump Design	Simple-acting reciprocating piston pump
Flow Rate	approx. 0,25 liter/stroke
Outlet Manifold	Outlet clip for hose connection DN19 hose
Barrel connection	M64 x 4 and G 2"
Telescopic Suction Pipe	470 mm to 925 mm
Outlet Hose	1,5 m with outlet bend of galvanised steel




Accessories For Centrifugal Pumps

Hand Nozzels




Part Number	Description	Seal material
9016	Polypropylene – ¾" O.D. (19 mm) – Hose Barb Intake	Viton®
9016E	Polypropylene – ¾" O.D. (19 mm) – Hose Barb Intake	EPDM
9071	Polypropylene – ¾" O.D. (19 mm) – Hose Barb Intake	Viton®
9071E	Polypropylene – ¾" O.D. (19 mm) – Hose Barb Intake	EPDM
9070	Polypropylene – 1" O.D. (25 mm) – Hose Barb Intake	Viton®
9070E	Polypropylene – 1" O.D. (25 mm) – Hose Barb Intake	EPDM
9026	Stainless 316 – 1" O.D. (25 mm) – Hose Barb Intake	PTFE
9090	PVDF – 1" O.D. (25 mm) – Hose Barb Intake	Viton®
9090E	PVDF – 1" O.D. (25 mm) – Hose Barb Intake	EPDM
9091	PVDF – ¾" O.D. (19 mm) – Hose Barb Intake	Viton®
9091E	PVDF – ¾" O.D. (19 mm) – Hose Barb Intake	EPDM
9030	Aluminium – 1" O.D. (25 mm) – Hose Barb Intake	Buna

Discharge Hoses



Part Number	Description
LH-9032	Clear Braided PVC 1" I.D. x 1.25" O.D. (25 mm x 32 mm) Max. Temperature: 40°C Max. Operating Pressure: 10 bar / 20°C



Part Number	Description
LH-9033	Clear Braided PVC ¾" I.D. x 1" O.D. (19 mm x 25 mm) Max. Temperature: 40°C Max. Operating Pressure: 13 bar / 20°C



Part Number	Description
LH-2536	1" Hose for diesel and petrol Max. Operating Pressure: 20 bar / 60°C



Part Number	Description
9034M-A	Chemical and AtEx Hose Optimit hose 1" UHMW PE black conductive Suitable for AtEx Zones 0 and 1 1" I.D. x 1.47" O.D. (25 mm x 37 mm) Temperature: -25°C – +100°C depending on liquid Max. Operating Pressure: 16 bar Material of Construction: Ultra High Molecular Weight Polyethylene Note: Designed to be Used for Flammable / Combustible Liquids Please contact us for further details as to using it for chemicals. Datasheet on request.




Part Number	Description
9034M-B	Chemical, AtEx and Food Hose ¾" I.D. x 1.22" O.D. (19 x 31 mm) (Part no. 9034M-B1) or 1" I.D. x 1.50" O.D. (25 x 38 mm) (Part no. 9034M-B2) Max. Operating Pressure: 16 bar Datasheet on request.




Accessories For Centrifugal Pumps

Barrel Adapters



Part Number	Material	Description
9015	Polypropylene	2" O.D. (51 mm)
8802	Stainless 304 (for 6600/6700 & 7600 / 7700 Series)	2" MNPT
9002	Stainless 304 (for SS Series)	2" O.D. (51 mm)
9022	Stainless 304 (for AL Series)	2" O.D. (51 mm)

Fume Barriers



Part Number	Material	Description
9018	Polypropylene	2" MNPT, EPDM Seal
8804	Stainless 304 (for 6600/6700 & 7600/7700 Series)	2" MNPT, EPDM Seal
9019	Stainless 304 (for SS Series)	2" (51 mm), EPDM seal
9024	Stainless 304 (for AL Series)	2" (51 mm), EPDM seal

IBC Accessories



Part Number	Description	Dimensions
SPE-9020	Pump adaptor for IBC cap	
SPE-9020A	Special cap	Ø150 mm
SPE-9020B	Special cap	Ø225 mm
SPE-9021A	Thread adaptor for IBC cap	Trisure x R2"

Suction Strainers



Part Number	Material	Mesh Size
9011	Polypropylene	.63" x .098" (16 x 2,5 mm)
7012	Stainless 316 (for 6600 / 6700 & 7600 / 7700 Series)	.58" x .051" (14,7 x 1,3 mm)
9012	Stainless 316 (for SS & AL Series)	.58" x .051" (14,7 x 1,3 mm)
9043	PVDF (Kynar®)	.63" x .098" (16 x 2,5 mm)

Quick Disconnect



Part Number	Description
125A100C	Polypropylene – 1.25" Thread x 1" Barb (32 mm x 25 mm)

Wall Bracket & Hand Clamp



Part Number	Description
9006	Stainless Steel Wall Storage Bracket Designed for Pump Storage
9005	SS316, Engineered to Vertically Stabilize Pump

Heating Jackets (AtEx incl.) for 200 ltr. drums and 1000 ltr. IBC

Standard Pump Europe's heating jackets are the right solution for keeping media at the required temperature. They are made of water resistant materials and are IP 40 classified (IP54 on request). The heating jackets come with quick release buckles for easy installation and removal. All our heating jackets are supplied with 3 meters of braided power cable and fitted with a 0 to +90°C capillary thermostat. The heating jackets are suitable for metal, PP, PE drums and containers.



Heating Jackets for 200 ltr. drums

Part Number	SPE-0200-00
Power	230V AC – 1 x 1200 W
Dimensions	1990 x 800 mm
Temperature	0 – 90°C

Part Number	SPE-0200-01
Power	230V AC – 1 x 530 W
Dimensions	1990 x 450 mm
Temperature	0 – 90°C

High Temperature Heating Jacket

Part Number	SPE-0200-02
Power	230V AC – 1 x 1200 W
Dimensions	1990 x 800 mm
Temperature	0 – 200°C

Part Number	SPE-0200-LID (to be ordered separately)
	Insulation lid for 200 ltr. drums



Heating Jackets for 1000 ltr. IBCs

Part Number	SPE-1050-02
Heating Zones	2
Power	230V AC – 2 x 1000 W
Dimensions	4400 x 1000 mm

Part Number	SPE-1050-03
Heating Zones	3
Power	230V AC – 3 x 1000 W
Dimensions	4400 x 1000 mm

Part Number	SPE-1050-LID (to be ordered separately)
	Insulation lid for IBC



Base heater for 200 ltr. drums

Part Number	SPE-0200-BASE
Diameter	550 mm
Thermostat	0 – 150°C
Power	230V – 900W

AtEx Heating Jackets for 200 ltr. drums and 1000 ltr. IBC

Standard Pump Europe's heating jackets for the AtEX are the right solution for heating and maintaining media at the required temperature. They are made of water resistant materials and are IP 65 classified. The AtEx heating jackets come with quick release buckles for easy installation and removal. The heating jackets are suitable for metal and PE drums and containers. Complete PTFE-(Teflon®) coating for maximum long-life cycle and highest reliability against acids, solvents etc.



AtEx Heating Jackets for 200 ltr. drums

Part Number	SPE-0200-EX
Power	230V AC – 1 x 1050 W
Heating Element	Self-limiting
Temperature Range	To be specified
Dimensions	1990 x 800 mm

Part Number	SPE-0200-LIDEX (to be ordered separately) Insulation lid for 200 ltr. drums
--------------------	--



AtEx Heating Jackets for 1000 ltr. IBCs

Part Number	SPE-1000-EX
Heating Zones	2
Power	230V AC – 1 x 1500 W
Heating Element	Self-limiting
Temperature Range	To be specified
Dimensions	4400 x 1000 mm

Part Number	SPE-1000-LIDEX (to be ordered separately) Insulation lid for IBC
--------------------	---


Technical Specifications

Heating Element	Self-limiting
Ambient Temperature	- 55°C – + 55°C (jackets for higher temperature on request)

Directive and Classification

AtEx 2014 / 34 / EC – II 3G Ex e II T2 – T5

Progressive Cavity Pumps and Lifting Device System

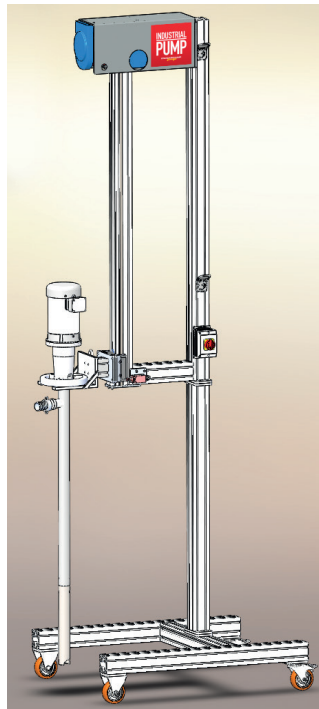

Lifting Device System – details please see page 29.

SP-700SR Progressive Cavity Series

STANDARD's 700SR Series pumps are engineered to transfer viscous materials from drums and ToteTanks®. The progressive cavity design delivers a continuous flow of material with little product degradation. Pumps are available with TEFC and Hazardous Duty motors. Maximum viscosity is 25,000 cps (mPas).

Common Applications

- Polymers
- Paints
- Oils & Greases
- Adhesives
- Resins
- Varnishes

Technical Data

Design	Progressive Cavity / Positive Displacement	
Max. Viscosity	<ul style="list-style-type: none"> • 751 & 752 Series • 1851 Series 	25,000 cps (mPas) 10,000 cps (mPas)
Discharge Port	1½" (38 mm) Hose Barb Optional 1.25" (32 mm)	
Stator Materials	PTFE or Buna	
Mechanical Seal	SiC/Viton®/SiC	
Immersion Lengths	27" (700 mm) 39" (1000 mm) 47" (1200 mm) <i>Please add 5" (127 mm) to the immersion length of pump for the 752 Series pumps.</i>	
Wetted Material	Tube & Rotor Assembly: Stainless Steel 316	
Stator Material	PTFE or Buna	
Motor Drives	SP-ENC Series	
Fittings	Threaded design enables operator to disassemble pump quickly for cleaning, maintenance and inspection	
Max. Flow Rate	<ul style="list-style-type: none"> • 1851 Series • 751 & 752 Series 	45 LPM based on water 26 LPM based on water
Max. Discharge Pressure	<ul style="list-style-type: none"> • 751 & 1851 Series • 752 Series 	6 bar 12 bar
Max. Temperature	<ul style="list-style-type: none"> • Teflon Stator • Buna Stator 	148° C 85° C
Max. Solid Size	.25" (6 mm)	

Benefits

- Easy To Clean & Maintain
- Interchangeable Motor Drives
- Continuous Flow
- Low Shearing Properties
- Threaded Components

Note: This pump is intended for intermittent duty use only.
Viton® is a registered trademark of DuPont Dow Elastomers.

Motor Drives




SP-ENC Series




SPE-950 Series

Note: Refer to page 9-10 for motor information

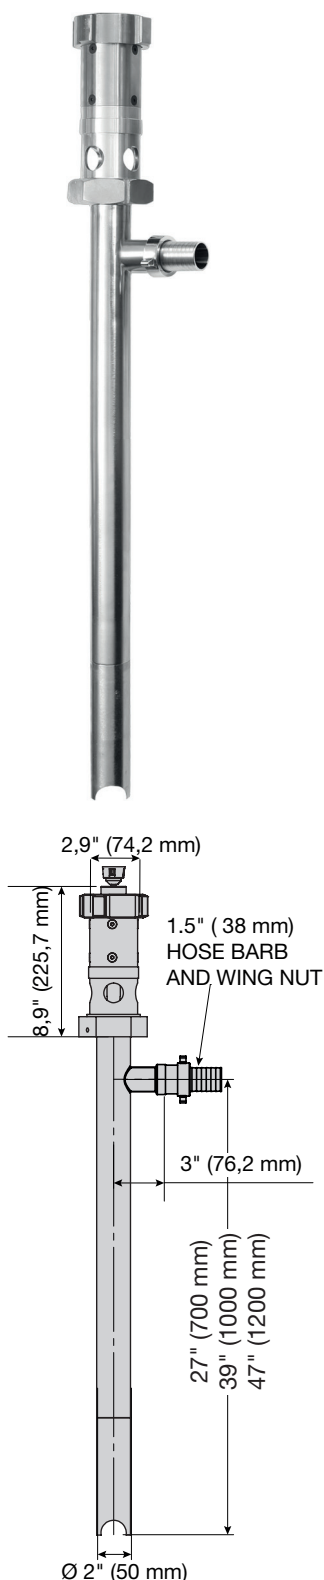

SP-700DD Progressive Cavity Series

STANDARD's 700DD Series pumps are engineered to transfer viscous materials from drums, Intermediate Bulk Containers (IBC) and large storage vessels. Utilizing the principle of positive displacement, these pumps deliver a continuous flow of material with little product degradation. Pumps are available with a TEFC electric or air powered motors. Maximum viscosity is 100,000 cps (mPas).

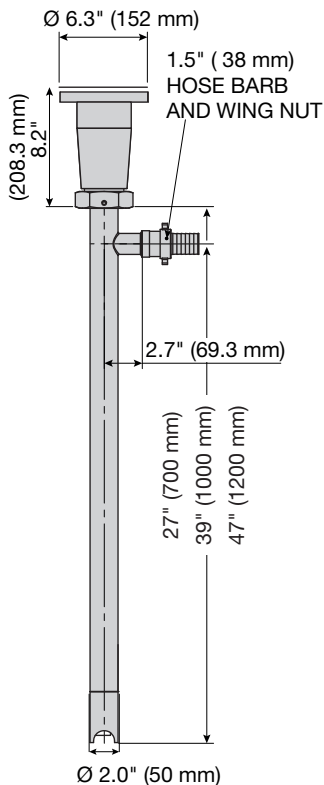

Common Applications

- Polymers
- Resins
- Adhesives
- Oils & Greases
- Paints
- Varnishes

Technical Data

Design	Progressive Cavity / Positive Displacement	
Max. Viscosity	<ul style="list-style-type: none"> • 751& 752 Series • 1851 Series 	100,000 cps (mPas) 10,000 cps (mPas)
Discharge Port	1½" (38 mm) Hose Barb Optional 1.25" (32 mm)	
Stator Materials	PFTE or Buna	
Mechanical Seal	SiC/Viton®/SiC	
Immersion Lengths	27" (700 mm) 39" (1000 mm) 47" (1200 mm) <i>Please add 5" (127 mm) to the immersion length of pump for the 752 Series pumps</i>	
Wetted Material	Tube & Rotor Assembly: Stainless Steel 316	
Stator Material	PFTE or Buna	
Motor Drives	IEC & Pneumatic	
Fittings	Threaded design enables operator to disassemble pump quickly for cleaning, maintenance and inspection	
Mounting Flange	B14/C140-160	
Max. Flow Rate	<ul style="list-style-type: none"> • 1851 Series • 751& 752 Series 	45 LPM <i>based on water</i> 26 LPM <i>based on water</i>
Max. Discharge Pressure	<ul style="list-style-type: none"> • 751 & 1851 Series • 752 Series 	6 bar 12 bar
Max. Temperature	<ul style="list-style-type: none"> • Teflon Stator • Buna Stator 	148°C 85°C
Max. Solid Size	.25" (6 mm)	

Benefits

- Easy To Clean & Maintain
- Interchangeable Motor Drives
- Continuous Flow
- Low Shearing Properties
- Threaded Components

Motor Drives



IEC



Pneumatic

Note: Refer to page 30 for motor information




Viton® is a registered trademark of DuPont Dow Elastomers.




Performance Curves


751 Series Pumps

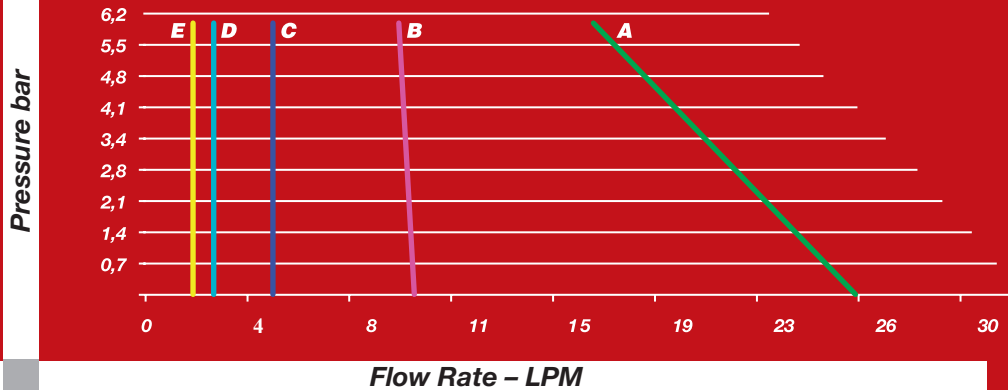

752 Series Pumps

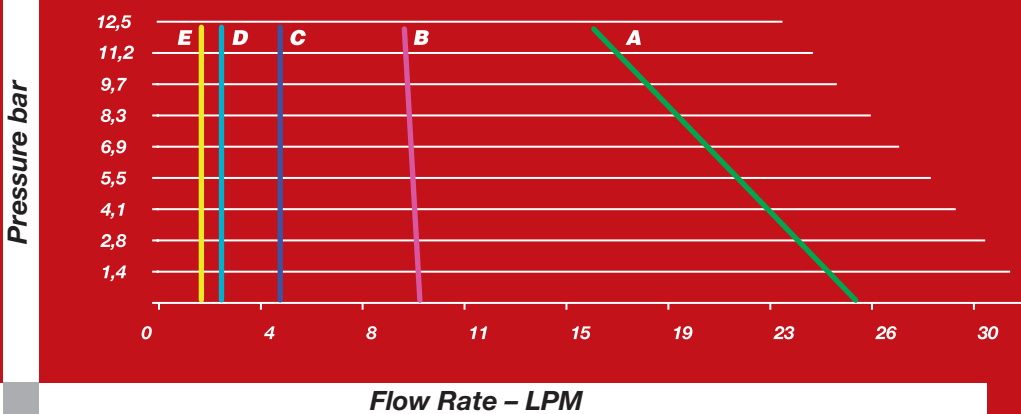


1851 Series Pumps

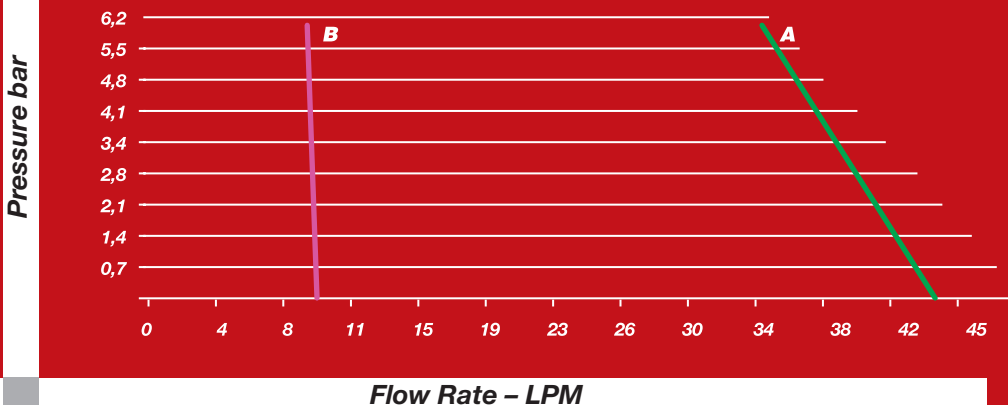

Technical Notes

- Performance Curves are intended to be used as a guide only as individual results may vary.
- Pump Stator Elastomers (Teflon or Buna) may vary performance.
- Performance Curves were created using a 900 RPM motor. Reducing motor speed will decrease pump performance. Do NOT increase motor speed above 900 RPM's.
- Pump Curves were created with a Newtonian Polymer (Viscosity remains constant regardless of shear). Non-Newtonian materials (viscosity does not remain constant with shearing) may vary performance.

Lifting Device System for Drum Pumps and Motors

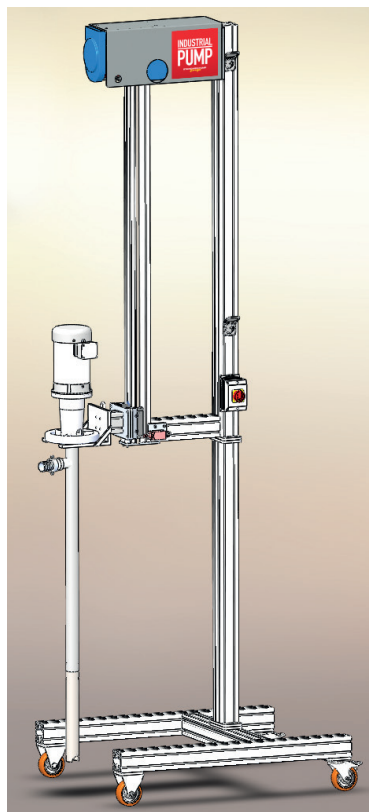

Device for lifting drum pumps with motors in and out of IBC containers or drums

Description	Stand with electric cable winch
Max. Lifting Weight	90 kg
Power Supply	3 x 400V/50Hz with safety switch and low voltage relay automatic on/off at upper and lower end of lifting range other power supply, please contact your distributor

Outer Dimensions (mm):

Outside	1010 mm x 1600 mm
Inside	850 mm (to fit to an IBC container)
Heights	App. 2000 mm
Total Lift	App. 1250 mm
Total Height	App. 3000 mm

Material/Construction:

Anodized Extruded Aluminium Profile

80 mm x 80 mm

Wheels

2 x swivel castors, 2 x fixed castors

Assembled


Semi

Motors for SP-700DD Pumps



Electric Motor 190/380 // 230/460 / 3 / 50-60 Hz

Part Number	HP	kW	RPM	Enclosure	Frame	Flange
SP-502	0.75	0,55	750–900	TEFC (IP55)	90LC	B14/C140
SP-512	1.0	0,75	750–900	TEFC (IP55)	100LC	B14/C160
SP-522	1.5	1,1	750–900	TEFC (IP55)	100LC	B14/C160
0017	Motor wiring for 230V/3/50-60 Hz					



Pneumatic Motor

Part number	HP	kW	RPM	Air Consumption	Frame	Air Conn. Inch (mm)
SP-A4	2.0	1,5	300–900	80 CFM @ 100 psi 37 L/Sec @ 7 bar	IEC#72/D71	0.375"
SP-A6	4.0	3,0	300–900	130 CFM @ 100 psi 65 L/Sec @ 7 bar	IEC#72/D80	0.5"
SP-A8	5.0	3,7	300–900	170 CFM @ 100 psi 80 L/Sec @ 7 bar	IEC#72/D90	0.5"

Note: Optimal pneumatic motor speed is 900 RPM. Failure to comply may result in pump damage or premature failure.

Accessories for Progressive Cavity Pumps



Discharge Hose Clamp

Part Number	Description
9038	Malleable Iron Two Bolt Clamp Gripping Ridges, Reinforced Lugs Hose Size from 1-48/64" to 2-3/64" (44,50 mm to 52 mm) Torque Value: 27 ft. lbs. (3,75 kg/m) for Proper Attachment



Discharge Hoses

Part Number	Description	Nom. ID DIN/in/Dash	Nom. OD mm	Bend Radius mm	Vacuum in/mm	Weight kg/m	Temp Range °C
9039	Recommended For: High pressure hydraulic oil lines. Tube: Black, oil resistant synthetic rubber. (Nitrile). Reinforcement: One braid of high tensile steel wire. Cover: Black, oil and abrasion resistant synthetic rubber. Flame Resistance: Meets Flame Resistant Designation "GL" Germanischer Lloyd. Meets Flame Resistant Designation "U.S. MSHA" of the US Department of Labor, Mine Safety and Health Administration.	40 /1.5 /-24	50,5	500	27/685,8	1,59	-34 to 104

Max. Dynamic WP
725/50 psi/bar

Max. Static WP
970/67 psi/bar

Min. Burst Pressure
2900/200 psi/bar



9034M-B3



Chemical, AtEx and Food Hose
1½" I.D. x 2.01" O.D. (38 x 51mm)
Max. Operating Pressure: 16 bar
Datasheet on request.



LH-9034

Clear Braided PVC
1½" I.D. x 2" O.D. (38 mm x 48 mm)
Max. Temperature: 40°C
Max. Operating Pressure: 5 bar / 20°C

Pump Hanger




Pump Hanger

Part Number	Description
743	Pump Hanger Provides a Convenient Solution for Attaching the Pump to a Hoist System



Quick Disconnect

Part Number	Description
150DSS/150ESS	1.5" (38 mm), SS316 Cam Lever Couplings, Buna N Gaskets, Max. Pressure: 150 psi (10,2 bar).



METERING SYSTEMS

ELECTRIC AND AIR



Batch Control System – ELECTRIC (Low Viscosity)

STANDARD's Batch Control System (BCS) is engineered to control, measure and dispense preset volumes of liquid from drums, IBC's, plating tanks or any large storage vessel. The BCS can be used in an industry where batching, chemical packaging or dilution is required to be accurate and efficient. Simply dial in the desired volume, press ENTER and the BCS delivers a preset volume of liquid virtually hands-free.



Common Applications

- Chemical Packaging
- Chemical Delivery
- Water Treatment Chemicals
- Chemistry For Plating Tanks

Features

- Re-settable Totalizer
- 7 Pre-Set Batches
- Relay Output Signal
- Remote Start Capabilities
- Turbine Paddle Wheel Design
- Measures: Gallons, Liters, Cubic Meters
- User Friendly "In Field" Calibration

Technical Data

Available Wetted Parts Motor Drive

Polypropylene, PVDF, Ceramic & Halar
SP-280 Series (IP44) or
SP-ENC Series (IP54)
(110 – 120 / 220 – 240v)

Discharge Fitting Pumping Principle

1" (25 mm) Hose Barb
Centrifugal / Seal-less

Flow Range

15,2 LPM – 102,2 LPM

Max. Viscosity

300 cps (mPas)

Immersion Length

27" (700 mm),
39" (1000 mm),
47" (1200 mm),
60" (1500 mm) or
72" (1800 mm)

Accuracy


± 0.61 % of Full Scale
± 1 % of Reading

Max. Temperature

Polypropylene 55°C
Stainless & PVDF 80°C

Min. Batch Size


1 Liter

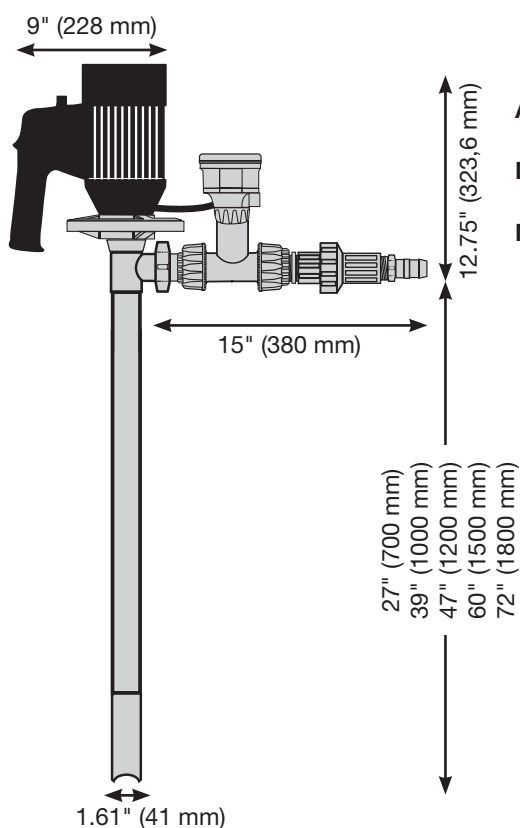

Controller Display

Batch Control System – ELECTRIC (High Viscosity)

STANDARD's Batch Control System (BCS) is engineered for high precision dosing and filling operations containing viscous materials. The Batch Control System is constructed with robust materials and a choice of motor drives, providing versatility and safety for the most challenging applications. Simply dial in desired volume, press ENTER, and the BCS delivers a preset volume of material virtually hands-free.

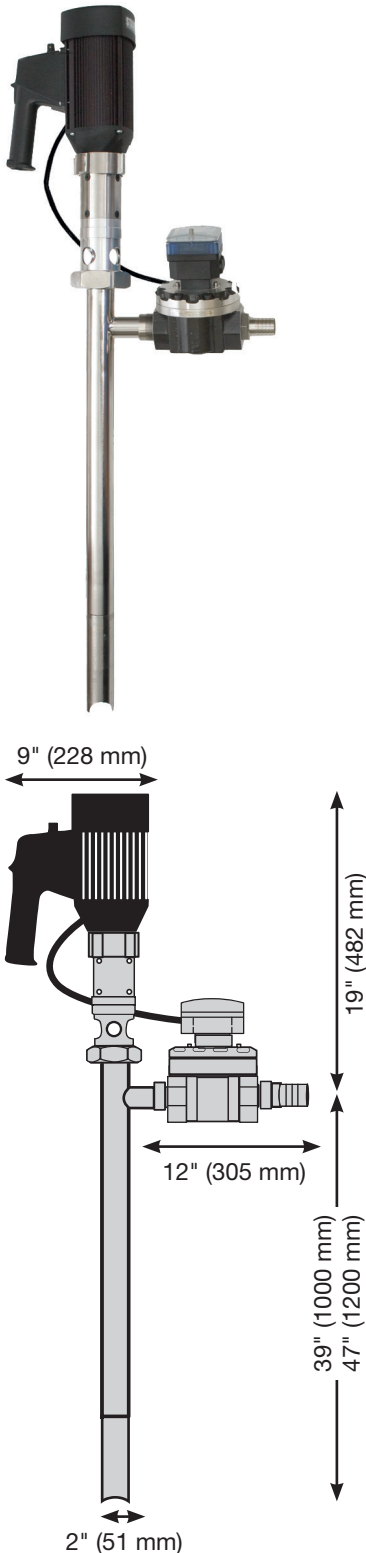

Common Applications

- Polymers
- Paints
- Resins
- Oils
- Varnishes (non-flammable)
- Petroleum Products

Features

- Oval Gear Design
- Re-settable Totalizer
- 7 Pre-Set Batches
- Relay Output Signal
- Measures: Gallons, Liters, Cubic Meters
- User Friendly "In Field" Calibration
- Remote Start Capabilities

Technical Data

Wetted Parts	SS316 / PPS / Aluminum / PTFE
Motor Drive	SP-ENC Series (IP54)
Discharge Fitting	1½" (38 mm) Hose Barb
Mechanical Seal	SiC/Viton®/SiC
Pumping Principle	Progressive Cavity – Positive Displacement
Max. Discharge Pressure	87 psi (6 bar)
Flow Range	9,8 LPM – 45 LPM <i>based on water</i>
System Weight	20 Kg
Immersion Length	39" (1000 mm) or 47" (1200 mm)
Viscosity Range	1-10,000 cps (mPas): Part no. 7611 (230V) – 39" (1000 mm) Part no. 7621 (230V) – 47" (1200 mm) 10,000-25,000 cps (mPas): Part no. 7615 (230V) – 39" (1000 mm) Part no. 7625 (230V) – 47" (1200 mm)
Metering Principle	Oval Gear
Accuracy	± 0.63% of Full Scale ± 1% of Reading
Max. Temperature	80°C



Controller Display

Batch Control System – AIR (Low Viscosity)

STANDARD's Batch Control System (BCS) is engineered for high precision dosing and filling operations containing viscous materials. The Batch Control System is constructed with robust materials and a choice of motor drives, providing versatility and safety for the most challenging applications. Simply dial in desired volume, press ENTER, and the BCS delivers a preset volume of material virtually hands-free.



Common Applications


- Chemical Packaging
- Chemical Delivery
- Water Treatment Chemicals
- Chemistry For Plating Tanks

Features

- Turbine Paddle Wheel Design
- Measures: Gallons, Liters, Cubic Meters
- Re-settable Totalizer
- User Friendly "In Field" Calibration
- 7 Pre-Set Batches
- PP & PVDF Materials of Construction
- Relay Output Signal

Technical Data

Motor Drive	Air, 1/2 HP (370W)
Discharge Fitting	1" (25 mm) Hose Barb
Mechanical Seal	SiC/Viton®/SiC
Pumping Principle	Centrifugal / Seal-Less
Flow Range	15,2 LPM – 75,7 LPM <i>based on water</i>
Immersion Length	27" (700 mm), 39" (1000 mm), 47" (1200 mm), 60" (1500 mm) or 72" (1800 mm)
Max. Viscosity	300 cps (mPas)
Metering Principle	Turbine (Paddle Wheel)
Accuracy	± 0.61% of Full Scale ± 1% of Reading
Max. Temperature	Polypropylene 55°C PVDF 80°C
Power Supply	230V

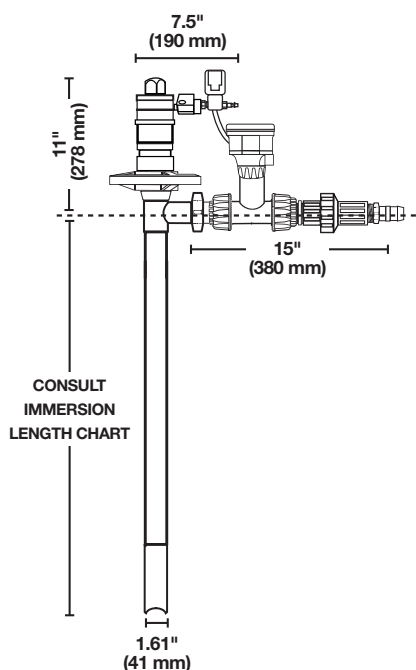

Controller Display

Batch Control System – AIR (High Viscosity)

STANDARD's Batch Control System (BCS) is engineered for high precision dosing and filling operations containing viscous duty materials. The Batch Control System is constructed with robust materials and a choice of motor drives, providing versatility and safety for the most challenging applications. Simply dial in desired volume, press ENTER, and the BCS delivers a preset volume of material virtually hands-free.



Common Applications


- Polymers
- Resins
- Paints
- Oils
- Varnishes (non-flammable)
- Petroleum Products

Features

- Oval Gear Design
- Measures: Gallons, Liters, Cubic Meters
- Re-settable Totalizer
- User Friendly "In Field" Calibration
- 7 Pre-Set Batches
- Remote Start capabilities
- Relay Output Signal

Technical Data

Wetted Parts	SS316 / PPS / Aluminium / PTFE
Motor Drive	Air, 2 HP (1,5 KW)
Discharge Fitting	1½" (38 mm) Hose Barb
Mechanical Seal	SiC/Viton®/SiC
Pumping Principle	Progressive Cavity - Positive Displacement
Flow Range	9,8 LPM – 45 LPM <i>based on water</i>
Max. Discharge Pressure	6 bar
Immersion Length	39" (1000 mm) or 47" (1200 mm)
Viscosity Range	<u>1-10,000 cps (mPas):</u> Part no. 7631 – 39" Part no. 7641 – 47" <u>10,000-25,000 cps (mPas):</u> Part no. 7635 – 39" Part no. 7645 – 47"
Metering Principle	Oval Gear 220V
Accuracy	± 0.63% of Full Scale ± 1% of Reading
Max. Temperature	80° C
Power Supply	230V

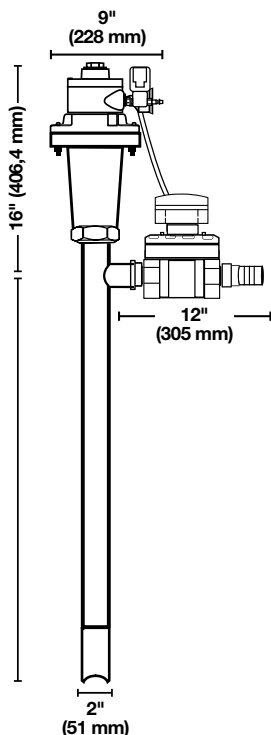

Viton® is a registered trademark of DuPont Dow Elastomers.

Turbine Flow Meters

STANDARD's Flow Meters address a broad scope of applications ranging from inert solutions to aggressive chemicals. These meters utilize a proven paddle wheel design and are available in a variety of sizes and materials. Meters are available in three configurations: Kits for Drum Pumps, Barb Connections, or Permanent Installation.



Common Applications

- Pump Monitoring
- Gravity Feed Applications From Tanks
- Continuous Flow Measurement
- Adding Chemistry to Plating Tanks
- Chemical Packaging
- Blending Agricultural Products
- Adding Colors and Fragrances

Features

- Measures Flow Rate and Volume
- IP65 Enclosure
- Re-settable Totalizer
- Battery Status Indicator
- User Friendly "In Field" Calibration
- EE Prom Electronics
- Two Line Alphanumeric Display Shows Flow Rate & Total Flow Together

Technical Data

Volume Flow Range	5 – 90 LPM
Nominal Width	1" external threat
Viscosity Range	0,8 – 40 mPas
Protection Category	IP 65
Operating Pressure	4 bar
Pulser Output	Optional, 25 Imp/l
Accuracy Uncalibrated*	± 2%
Accuracy Calibrated*	± 1%
Repeat Accuracy	± 0,5 %
Dimensions Approx.	90 x 130 x 61 mm
Weight Approx.	0,3 kg
Temperature Range	Operation: -10 °C – +50°C Storage: -20°C – +70°C
Battery:	Li-MO, Type CR ½ AA, 3,6 V 1200 mAh, exchangeable

* Test assembly: Medium water, settling section of 0.2 m before and behind meter.

Part Number	Type	Material*	Intake
SPE-FMT-PP	FMT II without pulse output	PP	Left
SPE-FMT-PPP	FMT II with pulse output	PP	Left
SPE-FMT-PVDF	FMT II without pulse output	PVDF	Left
SPE-FMT-PVDFP	FMT II with pulse output	PVDF	Left
SPE-FMT-CON	Connector kit for FMT II	PVDF	
SPE-FMT-CONP	Connector kit for FMT II	PP	

*Material of the measuring chamber, measuring chamber lid and the turbine.



Connector kit

Oval Gear Flow Meters

STANDARD's positive displacement flow meters are suitable for measuring a broad scope of materials ranging from water-like liquid to viscous materials. The meter utilizes proven oval gear technology to accurately measure flow rate and volume dispensed. The meter housing is available in Aluminum (with PPS gears) or Stainless Steel (with Stainless gears).



Common Applications

- Pump Monitoring
- Filling Applications
- Viscous Materials
- Polymers
- Paints
- Resins

Features

- Measures Flow Rate and Volume
- IP65 Enclosure
- Re-Settable Totalizer
- User Friendly "In Field" Calibration
- EE Prom Electronics
- Two Line Alphanumeric 12 Digit Display Shows Flow Rate & Total Flow Together

Technical Data

Available Sizes	1/2" (13 mm) – 2" (51 mm)
Shaft	SS316
O-Ring	NBR (Nitrile)
Ports	FNPT Inlet and Outlet Connections
Accuracy	± 0.63% of Full Scale ± 1% of Reading
Housing Materials	Aluminum (w/ PPS Gears) or SS316 (w/ SS316 Gears)
Max. Viscosity	1,000,000 cps (mPas)
Units of Measure	Gallons, Liters, Cubic Meters
Max. Temperature	Aluminum 80°C SS316 120°C
Metering Principle	Oval Gear
Max. Pressure	1/2" (13 mm) & 1" (25 mm): 800 psi (55 bar) 1 1/2" (38 mm) & 2" (51 mm): 260 psi (18 bar)
Flow Range	1/2" (13 mm): 1 LPM – 30 LPM 1" (25 mm): 6 LPM – 120 LPM 1 1/2" (38 mm): 10 LPM – 250 LPM 2" (51 mm): 15 LPM – 350 LPM



PlusAir

PlusAir – the new brand of air-operated double diaphragm (AODD) pumps

PlusAir is a product line of Standard Pump Europe and offers a wide range of AODD pumps for many different industries, e.g. Automotive, Chemicals, Paints, Inks or Wastewater to meet requirements in all industries.

PlusAir pumps are made by one of the world-wide leading pump manufacturers who has more than half a century of experience in developing and making AODD pumps.

PlusAir AODD pumps ranging from the light weight Polypropylene (1,3kg) version with a maximum capacity of 11,7 l/m to the stainless steel version weighing 104 kg with a maximum flow rate of 814 l/m.


PlusAir pumps are available in Polypropylene, Groundable Acetal, Aluminium, Stainless Steel, Cast Iron and PVDF.

AtEx certified pumps are available in many different sizes and many body and diaphragm materials.

For further details please contact your local distributor or Standard Pump Europe, E-mail: info@standard-europe.eu



PA-25BPS-PP-FL

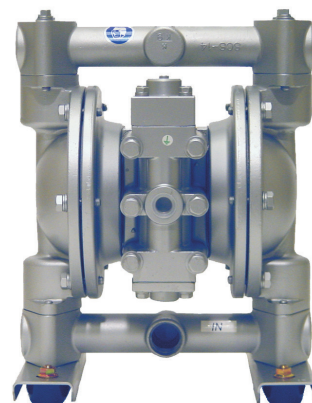


PA-20BSTU



PA-15FDT

www.standard-europe.eu




Additional Markets Served:



Pure Pump
- The Sanitary Line



Pure Pump
- AODD Series



PlusAir AODD Pumps
Industrial and FDA compliant



AdBlue
- DEF Pumps



Safety Comes Standard™

STANDARD PUMP
Europe

Rønnekrogen 2
3400 Hillerød
Denmark

Tel +45 7023 2100
Fax +45 7023 5655

www.standard-europe.eu

STANDARD
Pump

1610 Satellite Blvd., Suite D
Duluth, GA 30097
USA

Tel +1 770 307 1003
Fax +1 770 307 1009

www.standardpump.com

Distributed By:

