

SAFEGRIP®

THE NEW GENERATION SAFETY AND ANTISKID COATINGS FOR THE MARINE INDUSTRY



SAFEGRIP IS DEVELOPED ESPECIALLY FOR HARD WEARING AREAS LIKE: LINKSPANS . GANGWAYS . RAMPS . DECKS . WEATHERDECKS . STAIRS . PLATFORMS . ENGINE ROOMS ETC.

FJERBY

SAFEGRIP PU AND EP IS THE NEW GENERATION
SAFETY AND ANTISKID COATINGS TO FISHBONE AND
STRETCHED METAL



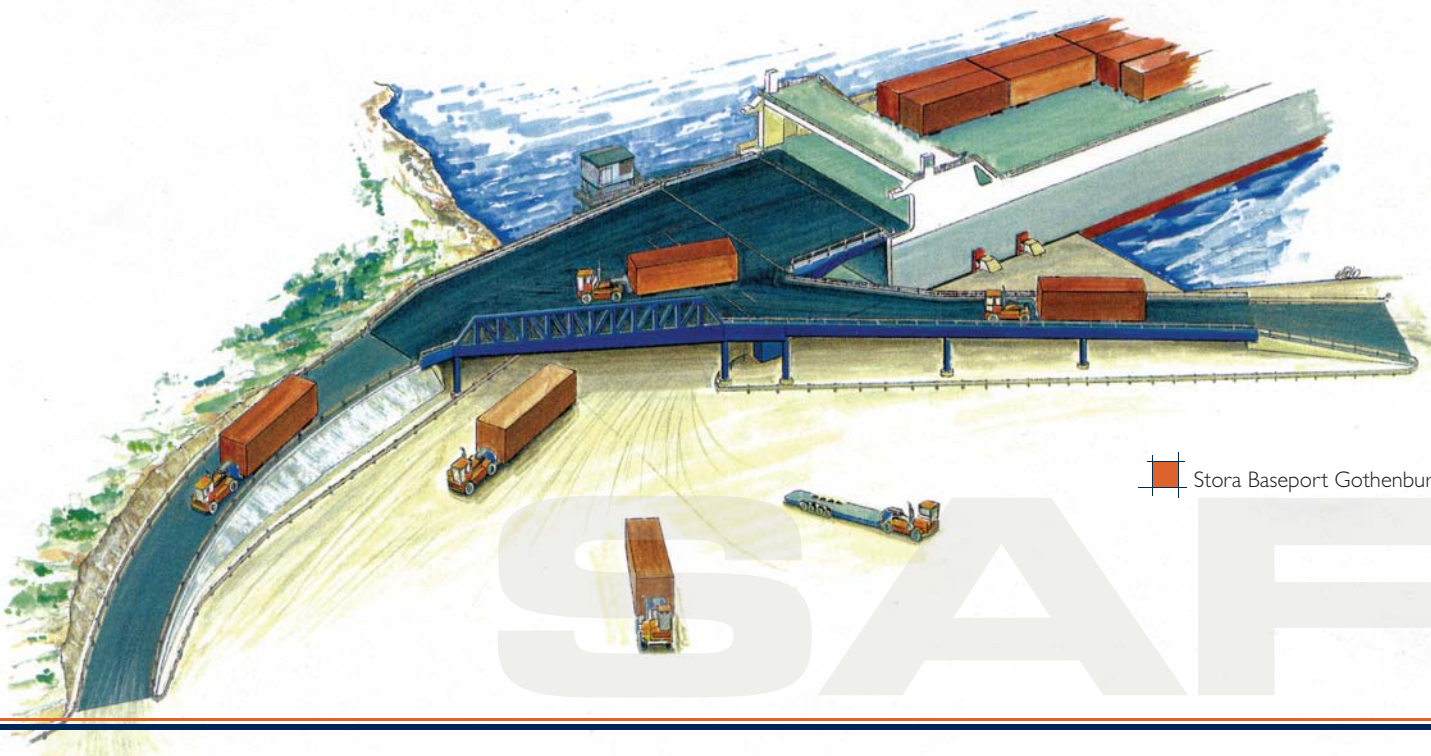
Linkspan, Gothenburg



Swedish fishing boat



M/V Tristan



Stora Baseport Gothenburg



Varberg Harbour



M/V Tor Flandria



Styrsjö Gothenburg



Linkspan Oslo Harbour











Vippetangen Oslo

SAFEGRIP PU AND EP GIVES MAXIMUM TRACTION
 UNDER DRY AND WET CONDITIONS

EGRIP®

SAFEGRIP®



| NAME | TYPE OF TRAFFIC | SPESIFICATION |
|--|--|---|
|  SAFEGRIP® EP 7080 TX M20: (Winter grade EP 7070) | Deck coating (Roro) | A less textured surface, using a 0,35-0,85 mm Dynagrip stone. The total weight is about 0,5-1,0 kg/m ² . Light grey |
|  SAFEGRIP® EP 7080 TX M16: (Winter grade EP 7070) | Deck and ramp coating (Cars and vans) | A less textured surface, using a 0,85-1,4 mm Dynagrip stone. The total weight is about 1,0-1,5 kg/m ² . Light grey |
|  SAFEGRIP® EP 7080 M16 (Winter grade EP 7070) | Deck and ramp coating (Pedestrians, cars and vans) | A less textured surface, using a 0,85-1,4 mm Dynagrip stone. The total weight is about 3,0 kg/m ² . With topcoat about 3,5kg/m ² |
|  SAFEGRIP® EP 7080 M12 (Winter grade EP 7070) | Deck and ramp coating (Pedestrians, cars and vans) | A less textured surface, using a 1,4-2,0 mm Dynagrip stone. The total weight is about 4,0 kg/m ² . With topcoat about 4,5kg/m ² |
|  SAFEGRIP® PU M16 | Medium traffic (Pedestrians, cars and vans) | A less textured surface, using a 0,85-1,4 mm Dynagrip stone. The total weight is about 8,5 kg/m ² |
|  SAFEGRIP® PU 1/3 | Medium traffic (Pedestrians, cars and vans) | A rough surface, using a 1-3 mm Dynagrip stone. The total weight is about 13 kg/m ² |
|  SAFEGRIP® PU 1/3X | Heavy traffic (Mafi-trolleys, trailers caterpillars) | A rough surface, using a 1-3 mm Dynagrip stone. The total weight is about 21 kg/m ² |
|  SAFEGRIP® PU 3/5 | Heavy traffic (Mafi-trolleys, trailers caterpillars) | A very rough surface, using a 3-5 mm Dynagrip stone. The total weight is about 21 kg/m ² |

In addition, systems can be tailor made to meet client requirements

For application, see our application guide

All the data and suggestions in this datasheet are based on tests and experiences. As the users working conditions is out of our control, we cannot take the responsibility for the results that the user obtains by using the product