

positive displacement flow meters

M10 – 1" meters with mechanical register

The M10 is the medium capacity meter in the M-SERIES™ range. It has the ability to handle a wide range of fluid viscosities with exceptional levels of repeatability and durability.

Features

- Compact size.
- Easy to read and operate mechanical register.
- Flexibility of installation options (e.g. can be mounted horizontally or vertically; no flow conditioning required).
- Low pressure drop allows for economical pump selection or gravity flow applications.
- Meter construction enables fast and easy on-site servicing without removal from application.
- Meter accuracy is verified by a factory calibration check after which an individual metrology report is issued.
- Meter design minimises the number of wearable and replaceable parts and extends product life.
- An Option of 100 Pulse per unit of measure output is available for the Analogue version.



M10ARM-X



Mechanical Register



MH450 Industrial Register



Analogue Mechanical Register

Specification:

Model	M10
Meter Type	Meter With Mechanical Register
Meter Body Material	Aluminium / 316 Stainless Steel/Bronze
Wetted Components:	
Rotor Material	PPS / 316 Stainless Steel
Shafts	316 Stainless Steel
O'ring	NBR (Nitrile)
Flow Rate Ranges (Litres Per Minute/US Gallons Per Minute)	
Above 5 cPs	6 To 120 / 1.6 To 32
Below 5 cPs	10 To 100 / 2.6 To 26
Accuracy- Within (Of Reading)	+/- 1% / Analogue Register +/- 0.5%
Repeatability	0.03%
Maximum Viscosity (Of Standard Model)	1000 Centipoise (>1000 Hi Vis Rotors)
Maximum Operating Pressure	3450kpa/ 500 Psi/ 34.5 Bar Or Flange Rule Where Fitted
Max. Operating Temperature	80°C / 176°F, High Temp Option 120°C / 248°F
Recommended Mesh Strainer Size	60 Mesh

Port Size

To order flowmeter you must replace 'X' with the relevant number. This number will determine the following specifications:

Port Size:	Calibrated and Display In:
1 = 1" BSP (F) ports	Litres
2 = 1" NPT (F) ports	US Gallons
3 = 1" ANSI 150lb Flange	Litres
4 = 1" ANSI 150lb Flange	US Gallons
5 = 25mm DIN 16 Flange	Litres
13=25mm JIS 10K Flange	Litres

PPS = Polyphenylene Sulfide Resins

Note: See relevant "Flange Technical Information" on page 45.

M10 – 1" meters with mechanical register


Options and accessories

M10 - 1" METERS WITH MECHANICAL REGISTER

	M10ARM-X	M10ASM-X	M10SRM-X	M10SSM-X	M10BRM-X
FKM O-Ring	○	○	○	○	○
FEP O-Ring	○	○	○	○	○
EPDM O-Ring	○	○	○	○	○
High Temp Rotors	○	●	○	●	○
High Viscosity Rotors	○	○	○	○	○
Hall Effect Sensor	-	-	-	-	-
Reed Switch	-	-	-	-	-
Solvent Kit	○	●	●	●	○
Hastalloy C Shafts	-	-	-	-	-
Analogue Register	○	○	○	○	○
MH 450 Register	○	○	○	○	○
Pulse Kit P500	+	+	+	+	+
Remote Mounted LC Display	-	-	-	-	-
Heating Jacket	+	+	+	+	+
4-20mA Module	-	-	-	-	-
Protective Boot Standard Mechanical Register	+	+	+	+	+

● Standard ○ Optional - Not Available + Accessory

Dimensions

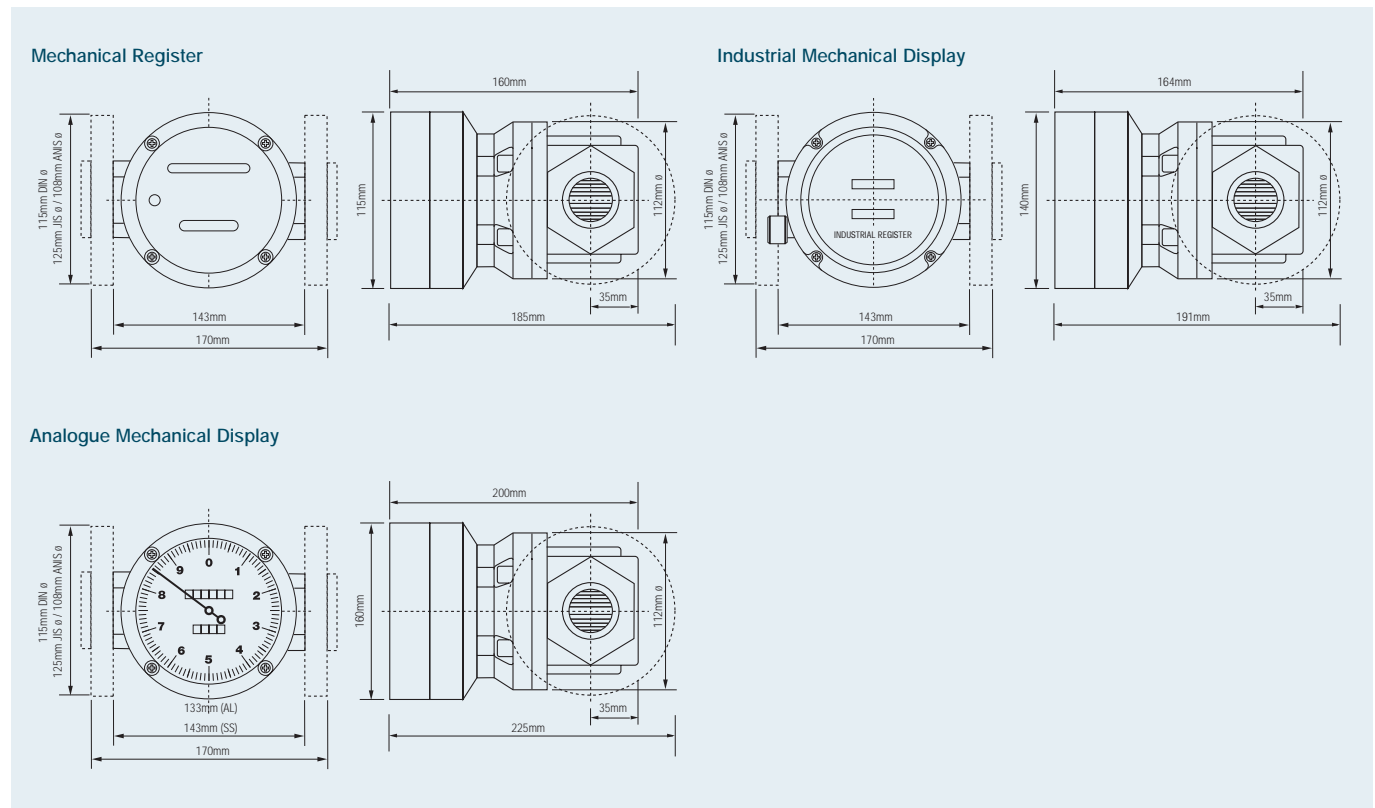

Macnaught Pty Ltd reserves the right to modify or alter product materials, dimensions, design and construction, when necessary, to improve the performance of our products. Please check with your local distributor or Macnaught to confirm current specifications of our products.