


PARAT MVS

Oil Fired Smoke Tube Boiler



PARAT MVS: Oil Fired Smoke Tube Boiler

Technical data

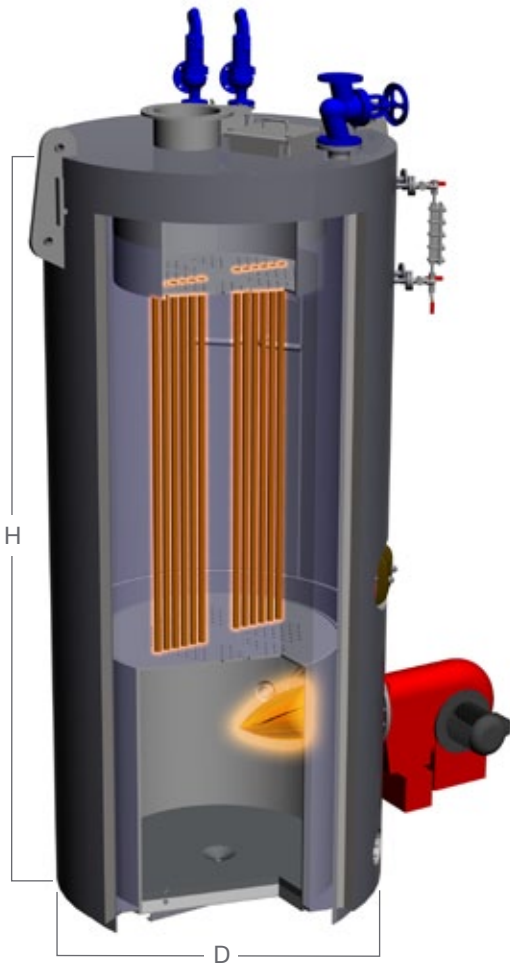

- Vertical design
- Pre-assembled, delivered as a compact unit
- Easy maintenance
- Capacity up to 6.5 t/h
- Approved by DNV, LRS, BV, ABS, etc

The boiler is of vertical design with smoke tubes through the boiler and steam evaporation at the upper section. The boiler is constructed from drawings approved by all classification societies and delivered with equipment in accordance with class requirements.

The oil burner is mounted at the side, easy accessible for inspection and maintenance. The combustion chamber is well dimensioned for burning of MDO and HFO. The boiler is delivered as a complete unit, insulated and preassembled with all valves and instruments, oil burner and control panel.

The control system is designed to achieve an unmanned engine room. The system is fully automatic and operates with electronic controllers and electric/pneumatic actuators. The panel is mounted on the boiler side. All control of the boiler panel is operated from the local touch screen. Boiler PLC can be connected to main control system by standard ethernet/profibus/modbus communication.

Output kg steam/h	1000	1500	2000	2500	3000	4000	5000	6500
D (mm)	1550	1700	1900	2000	2100	2300	2500	2700
H (mm)	4220	4420	4420	4520	4620	4920	4920	5170
Transport weight (kg)	4.500	5.500	6.500	7.500	8.500	10.000	11.000	13.000
Operation weight (kg)	8.600	10.700	13.000	15.000	16.500	21.000	24.000	30.000
Main steam valve DN	65	65	80	80	100	100	125	125
Safety valve DN	2x25	2x25	2x32	2x32	2x32	2x32	2x40	2x40
Feed Water valve	2x25	2x25	2x32	2x32	2x32	2x32	2x40	2x40
Blow Down valve	2x25	2x25	2x25	2x25	2x25	2x25	2x25	2x25
Flue gas outlet DN	300	300	350	400	400	500	500	550

Technical data based on operating pressure 7 barg and feed water temp 80°C.
We reserve the right to make changes.

