



Pneumatic Fenders
(ISO 17357:2002 (E))

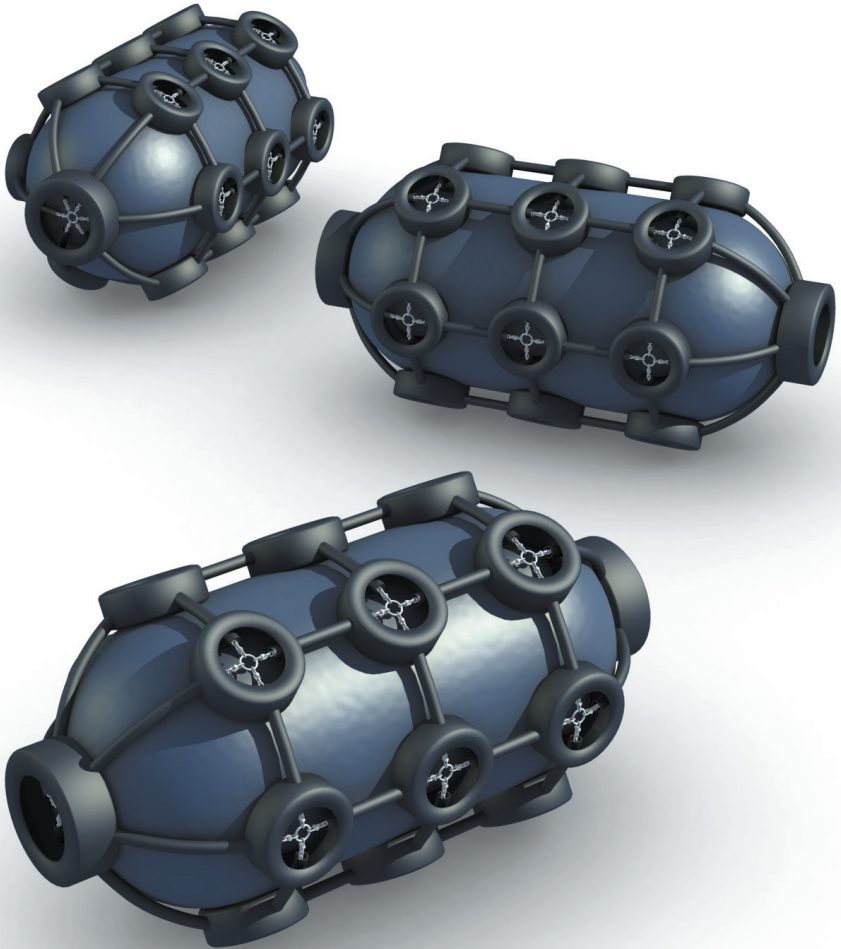

Pneumatic Fenders (ISO 17357:2014 (E))

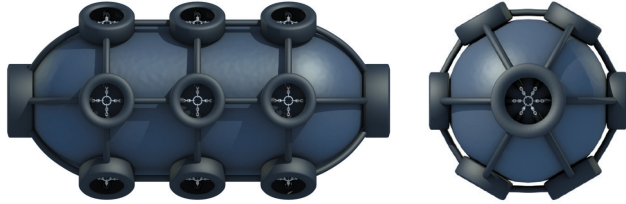

Nominal Size Diameter x Length mm	Guaranteed Energy Absorption (GEA) & Reaction Force (RF)		Total Weight (kg)
	Minimum Value at Deflection 60%±5%	Tolerance 10%±	
	GEA (kJ)	RF (kN)	
300 x 600	2.9	48.1	15
500 x 1000	5.9	58.9	24
800 x 1500	16.7	129.6	232
1000 x 1500	37.3	158.1	257
1000 x 2000	51.1	227.8	329
1200 x 2000	65.8	281.8	456
1500 x 2500	110.0	405.6	640
1500 x 3000	172.8	502.8	853
1500 x 4000	159.1	608.8	1460
2000 x 3500	326.0	819.0	1540
2500 x 4000	689.4	1296.2	2300
2500 x 5500	1001.6	1903.1	3020
3000 x 5000	1080.2	2013.1	4470
3300 x 4500	1183.3	1949.3	4270
3300 x 6500	1885.4	2867.4	5385
3300 x 9000	2651.4	4291.3	6520
3300 x 10600	3108.0	5122.1	7958
4500 x 9000	4713.6	5597.4	9210
4500 x 12000	6402.6	7914.9	12800

NOTE Other sizes are available. Specification sheet is available on request.

January 15